



REQUEST FOR APPROVAL

ITEM	Humidity Sensor Module
MODEL NO.	GHM-25C
DESCRIPTION	
CODE NO.	
APPLIED TO	
REFERENCE	

DRAWING	CHECK	APPROVAL



TO : _____

HUMIDITY MODULE

P/N : GHM-25C

=====

SPECIFICATIONS

=====

VINOSTECH



1. Scope of application

These specifications are applicable to the humidity sensor GB21-C

2. Type

GHM25 : humidity sensor unit(GB21-C) and thermister

3. Configuration

The configuration of the humidity sensor unit is shown on the attached Fig.-1.

4. Electrical characteristics

- | | |
|--------------------------------------|------------------------|
| 4 - 1. Rated voltage | : 5VAC (max.) |
| 4 - 2. Rated power | : 0.3mW |
| 4 - 3. Operating temperature range | : 0 ~ 60℃ |
| 4 - 4. Operating humidity range | : 20 ~ 95%RH |
| 4 - 5. Humidity response time | : < 1min. (30 ~ 90%RH) |
| 4 - 6. Hysteresis | : ±2%RH (30 ~ 90%RH) |
| 4 - 7. Standard humidity resistance | : 24kΩ (25℃, 60%RH) |
| 4 - 8. Humidity measurement accuracy | : ±3%RH, ±5%RH |
| 4 - 9. Temperature dependence | : 0.6 %RH/℃ |

5. Mechanical characteristics

5 - 1. Shock resistance

Not to be abnormal in the appearance and electrical characteristics after having been naturally let to drop down 3 times at random onto a hard wooden plate from the height of 75cm.

5 - 2. Vibration resistance

Not to be abnormal in the appearance and electrical characteristics after having been vibration-tested for 2 hours each in the directions of X-Y-Z, at the frequency of 10 ~ 55Hz, and amplitude of 1.5mm (10-55-10).

5 - 3. Resistance to soldering heat

Not to be abnormal in the appearance and electrical characteristics after lead terminal shall be immersed down by 3mm from the substrate for 3 seconds in a solder bath of 260±5℃.

5 - 4. Strength of termination (tensile)

Lead terminal shall be secured by the body after it shall be pulled with the specified force of 500g for 10 seconds in the axial direction of lead terminal.



6. Reliability

6 - 1. Heat resistance

Leave for 1000 hours in the environment of 85℃ and 30%RH or less.

Then, further leave for 60 minutes under the normal temperature and humidity.

Thereafter, to be within ±5%RH of change in the initial value.

6 - 2. Cool resistance

Leave for 1000 hours in the environment of -30℃ and 70%RH or less.

Then, further leave for 60 minutes under the normal temperature and humidity.

Thereafter, to be within ±5%RH of change in the initial value.

6 - 3. Humidity resistance

Leave for 1000 hours in the environment of 40℃ and 95%RH or less.

Then, further leave for 60 minutes under the normal temperature and humidity.

Thereafter, to be within ±5%RH of change in the initial value.

6 - 4. Humidity cycle

Here, one cycle shall be to leave for 30 minutes under 25℃, 30%RH continue to leave for 30 minutes while raising to 90%RH, leave for 30 minutes under 90%RH and further leave for 30 minutes while lowering to 30%RH.

Repeat such 500 cycles.

Then, leave for 60 minutes under the normal temperature and humidity.

Thereafter, to be within ±5%RH of change in the initial value.

6 - 5. Temperature cycle

Here, one cycle shall be to leave for 30 minutes under -30℃.

Continue to leave for 30 minutes while raising the temperature to 85℃, leave for 30 minutes under 85℃ and further leave for 30 minutes while lowering the temperature to -30℃. Repeat such 100 cycles.

Then, leave for 60 minutes under the normal temperature and humidity.

Thereafter, to be within ±5%RH of change in the initial value.


6 - 6. Organic solvent resistance

Leave for 300 hours in the environment of 25℃,

Benzene 30Wt.% + Xylene 40Wt.% + Toluene 30Wt.%.

Then, leave for 2 hours under the normal temperature and humidity.

Thereafter, to be within ±5%RH of change in the initial value.




Impress for 3000 hours the frequency of 1kHz, and voltage of $1V_{rms}$ under the normal temperature and humidity.

Thereafter, to be within $\pm 5\%$ RH of change in the initial value.

- (1) Positively don't impress DC to the humidity sensor.
- (2) Avoid condensation and drenching as much as possible.
- (3) Using in relatively clean air.

(c) Organic gases - Alcohols, Glycols, etc. (Solvent)

Whenever there are any necessities for changing and/or adding the characteristics to this specification, it can be changed and/or added by customer's requirement.



Technical drawings of the 12V 100Ah battery showing dimensions in millimeters (mm):

- Top View:** Shows a rectangular battery with a width of 7.62 mm and a height of 10.16 mm. The terminal posts are 0.5 mm wide and 0.3 mm thick.
- Front View:** Shows the battery's height of 15.0 mm and width of 12.0 mm. The terminal posts are 0.635 mm wide and 0.3 mm thick.
- Side View:** Shows the battery's height of 15.0 mm and width of 12.0 mm. The terminal posts are 0.635 mm wide and 0.3 mm thick.
- Cross-sectional View:** Shows the internal structure of the battery, including the electrolyte and the terminal posts. The terminal posts are 1.9 mm wide and 4.5 mm high. The electrolyte level is indicated by a red line.

1413, Woolim e-biz center 1cha, 170-5, Guro 3-dong, Guro-gu, Seoul, Korea
TEL : + 82 2 2108 1498 FAX : + 82 2 2108 1497



Fig 2. Basic characteristics

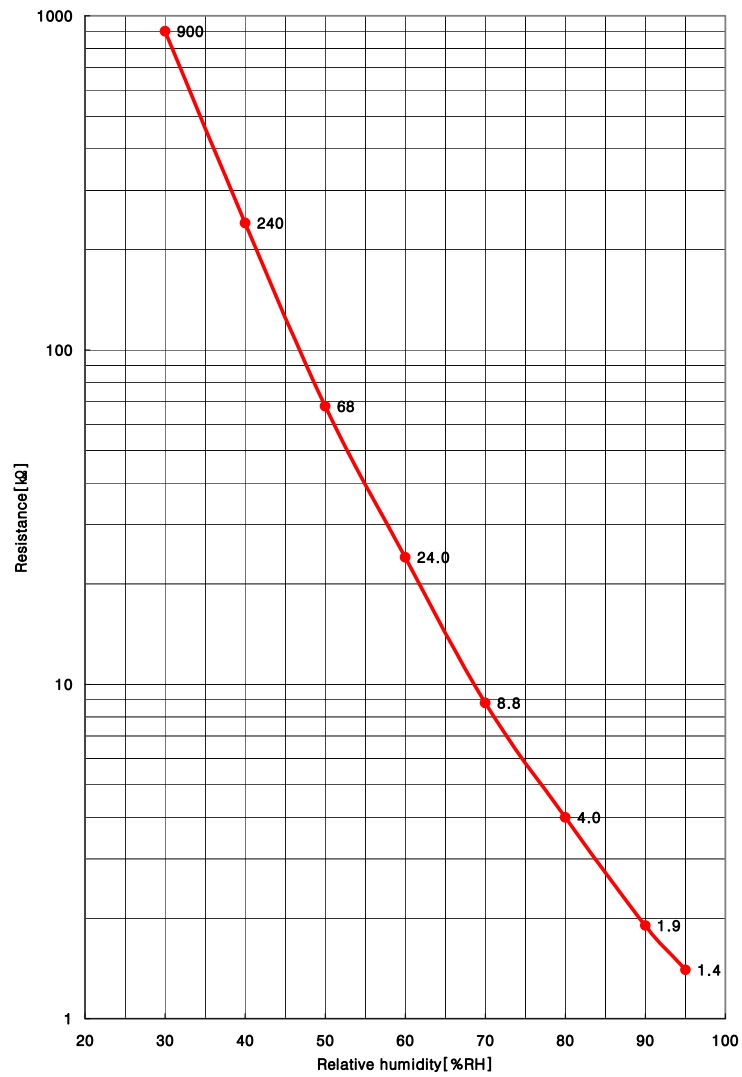


Fig 3. Temperature characteristics

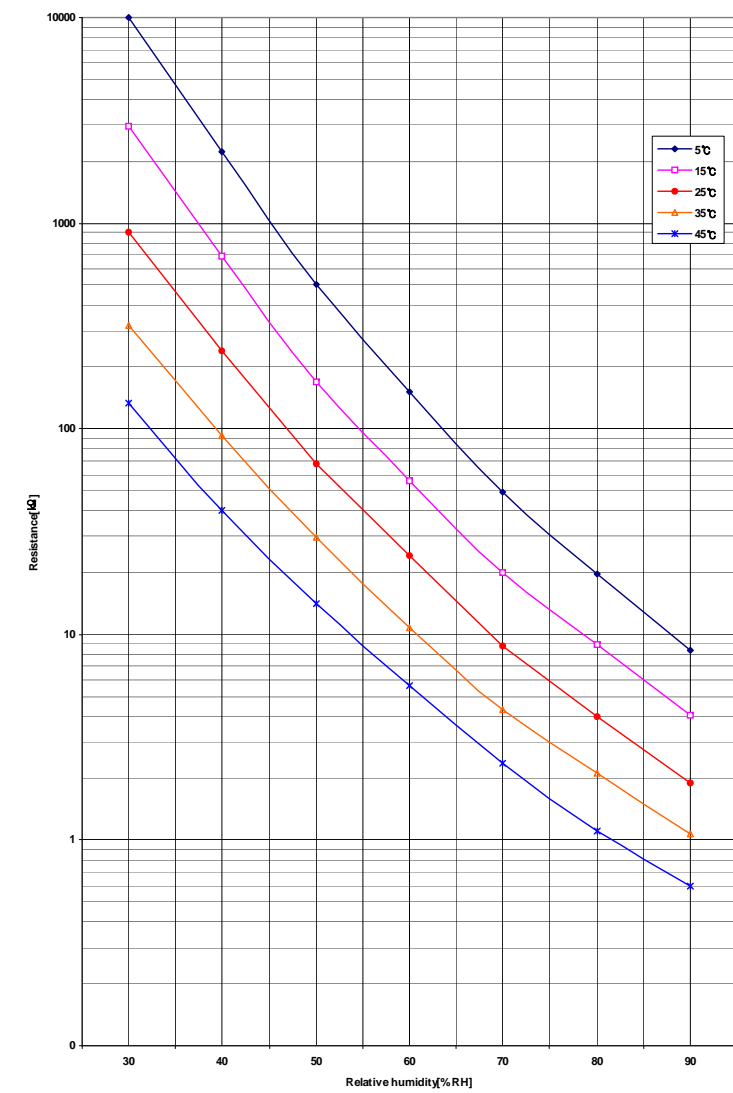




Fig 4. Frequency characteristics

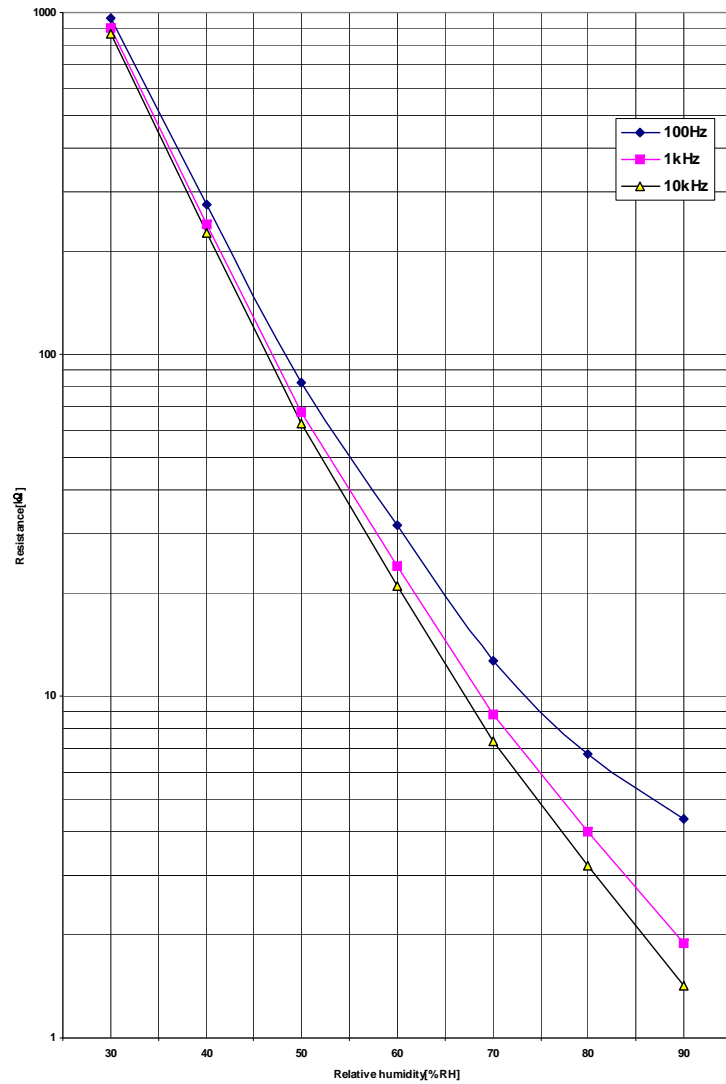


Fig 5. Response time

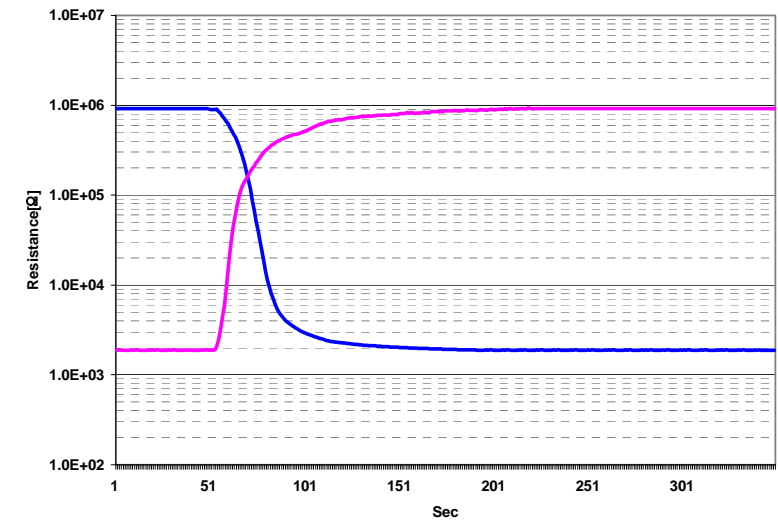


Fig 6. Driving circuits

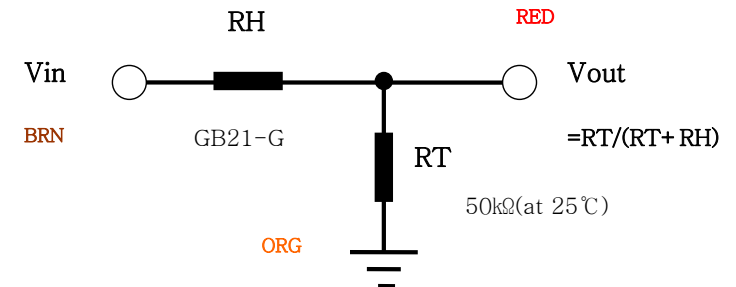




Fig 7. Characteristics curve

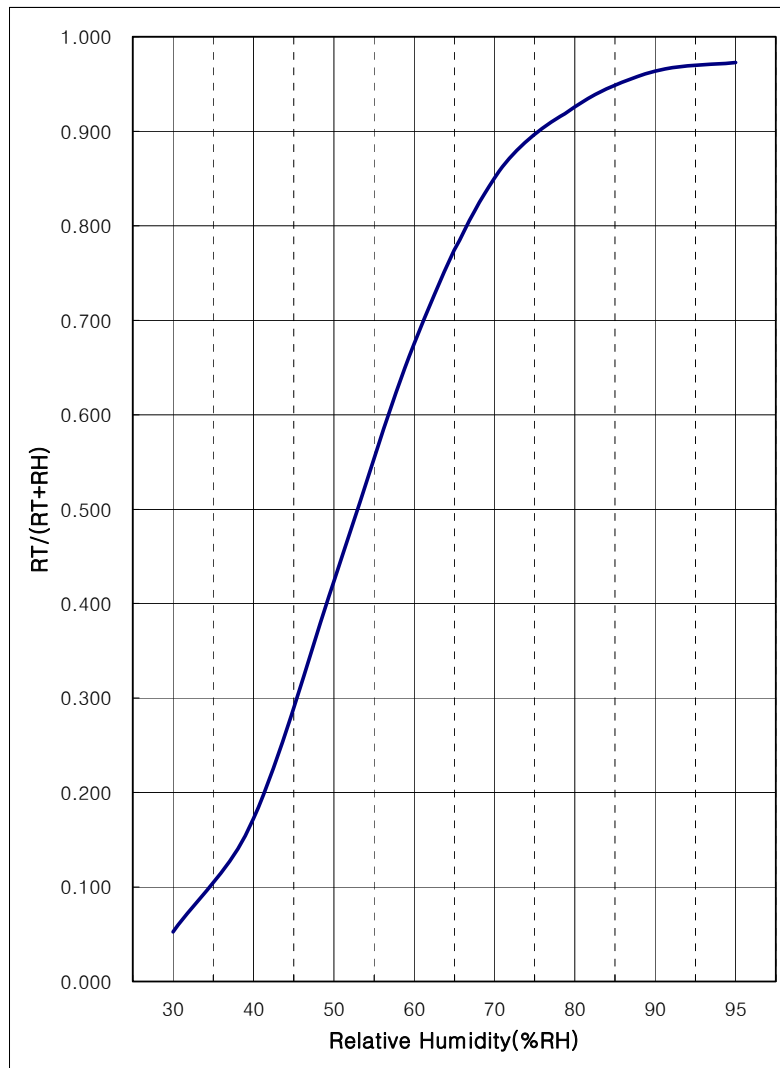


Fig 8. Dimensions(unit : mm)

