

Rapport III / Rapport III-PRO (Limited Area)

Multi Functional CCTV Tester




SPECIFICATIONS				
Electronic Characteristics	Input Voltage	12V ±10%, above 1.2A		
	Battery	Lithium Polymer Battery (Inner Packaging)		
	Built-in Charger	Charging time	More than 6 hrs	
		Operating time	More than 6 hrs(Max.8hrs)	
Image	Signal System	NTSC / PAL		
	Video Level	1.0Vp-p, 140 IRE		
PTZ Operation Test	Protocol	Multiple		
	Transmission Speed	2400 ~ 115.2kbps		
	Transmission Mode	RS-422 / RS-485		
UTP Cable Tester	Tests	Continuity / Crossed Cable, and Breaks or Short Circuits		
Multimeter	AC Voltage	Max. 300V		
	DC Voltage	Max. 300V		
	Resistance	Max. 40MΩ		
	Continuity	Beeper is activated when the resistance is below 80Ω		
	Dimensions	88(W) x 126(H) x 40(D) mm		

Features

- Color CCTV Field Monitor
- Video Signal Generator
- PTZ Protocol Analyzer
- Digital Multi Meter
 - Test & Measure Voltage, Resistance and Continuity
- UTP Cable Tester
 - Test for Direct & Cross cable, continuity, discontinuity and Shorts on UTP cable
- Video Recorder
- PTZ Controller
 - Control for PTZ cameras (Pan, Tilt, Zoom and menu Setup). And also analyzing control protocol if camera control by external device.
- DVR Mode (Rapoport III-PRO only)
 - MPEG4 Digital Video Recorder allows users to store video inputs on a SD card for future playback (Max. 10mins / 8files)

Dimensions

Unit : mm

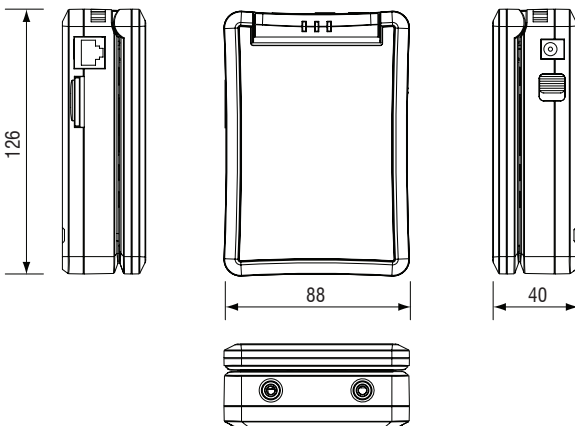

PART DETAILS

