


U-flex Standard

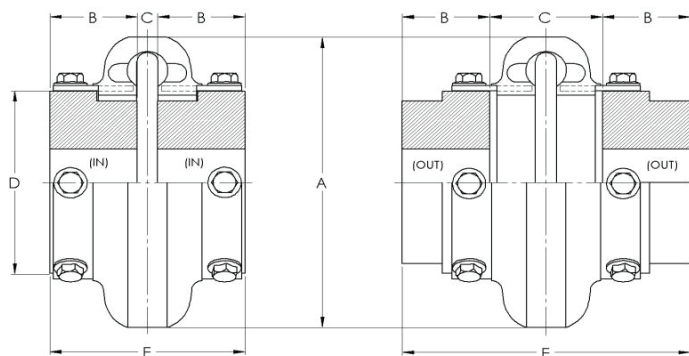

Size	Bore (max.)	RPM (max.)	HP/ 100RPM	Basic Torque		Dimensions (mm)							Weight (Kg)
						A	B	C		D	E		
				Kg-m	Nm			In	Out		In	Out	
U02	28.7	7,500	0.30	2.2	21.5	88.9	24.0	34.0	48.3	47.0	81.8	96.0	1.0
U03	35.1	7,500	0.58	4.2	41.2	101.6	38.0	20.6	33.3	59.0	96.8	109.5	2.1
U04	41.4	7,500	0.88	6.3	62.1	115.8	43.0	11.2	33.3	66.0	96.8	119.1	2.3
U05	47.8	7,500	1.48	10.7	104.5	136.7	44.0	20.6	46.0	80.0	109.5	134.9	3.7
U10	54.1	7,500	2.30	16.7	163.8	162.1	48.0	14.2	46.0	93.0	109.5	141.2	5.2
U20	60.5	6,600	3.65	26.5	259.9	184.2	52.0	12.7	60.5	114.0	117.4	165.1	8.2
U30	73.2	5,800	5.79	42.1	412.4	209.6	58.0	14.2	62.0	138.0	131.8	179.3	13.7
U40	85.9	5,000	8.85	63.4	621.4	241.3	63.0	14.2	68.1	168.0	141.2	195.1	21.6
U50	92.2	4,200	12.14	88.1	864.3	279.4	70.0	16.0	85.9	207.0	155.7	225.6	30.6
U60	101.6	3,800	19.84	144.0	1,412.3	317.5	82.0	17.5	87.4	222.0	182.6	252.5	43.3
U70	114.3	3,600	35.12	254.9	2,499.8	355.6	92.0	19.1	95.3	235.0	203.2	279.4	51.5
U80	152.4	2,000	62.70	455.1	4,462.9	406.4	124.0	19.1	127.0	286.0	266.7	374.7	108.2
U100	171.5	1,900	135.00	979.9	9,609.4	533.4	140.0	44.5	95.3	359.0	323.9	374.7	168.5
U120	190.5	1,800	270.00	1,959.8	19,218.7	635.0	152.0	57.2	124.0	448.0	361.7	428.8	275.3
U140	279.4	1,500	540.00	3,919.5	38,437.4	762.0	178.0	76.2	127.0	530.0	431.8	482.6	475.6

※ Coupling weight, without bore machining