
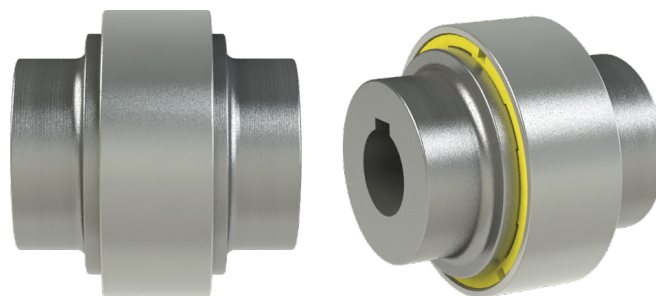


## F-flex Standard

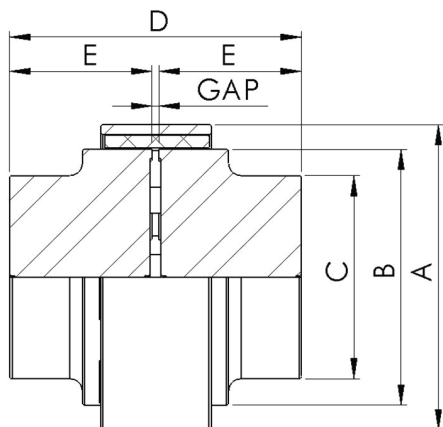

| Size | Torque (Kg·m) |        | RPM (max.) | HP / 100RPM |          | Bore(mm) |       | Dimensions(mm) |       |       |       |       |      |
|------|---------------|--------|------------|-------------|----------|----------|-------|----------------|-------|-------|-------|-------|------|
|      | Con.          | Int.   |            | Con.        | Int.     | Max.     | Min.  | A              | B     | C     | D     | E     | GAP  |
| F00  | 2             | 3.45   | 12,000     | 0.29        | 0.48     | 25.0     | 6.0   | 55.1           | 43.2  | 40.6  | 52.0  | 25.4  | 3.0  |
| F0   | 6.9           | 11.5   | 8,100      | 0.95        | 1.59     | 34.5     | 7.6   | 72.1           | 61.0  | 55.9  | 71.8  | 34.9  | 4.4  |
| F1   | 14.5          | 24.1   | 7,280      | 2.00        | 3.33     | 44.0     | 10.4  | 98.0           | 80.0  | 73.0  | 90.8  | 44.5  | 4.4  |
| F1H  | 27.5          | 46     | 6,500      | 3.81        | 6.35     | 49.0     | 15.5  | 110.4          | 88.1  | 78.7  | 100.3 | 49.2  | 4.4  |
| F2   | 34.5          | 57.6   | 5,800      | 4.76        | 7.93     | 57.0     | 15.5  | 122.4          | 99.1  | 88.9  | 116.2 | 57.2  | 4.4  |
| F3   | 66            | 110.5  | 4,700      | 9.14        | 15.23    | 63.5     | 19.1  | 146.1          | 124.5 | 101.6 | 128.9 | 63.5  | 4.4  |
| F4   | 145           | 241.9  | 3,600      | 20.00       | 33.00    | 85.5     | 23.9  | 193.0          | 162.6 | 139.7 | 170.2 | 82.6  | 7.6  |
| F5   | 330           | 553    | 2,800      | 46.00       | 76.00    | 114.0    | 25.4  | 246.4          | 207.8 | 165.1 | 233.7 | 114.3 | 8.1  |
| F6   | 553           | 921.5  | 2,300      | 76.00       | 127.00   | 139.5    | 38.1  | 299.7          | 252.2 | 203.2 | 284.5 | 139.7 | 8.1  |
| F7   | 1,278         | 2,131  | 2,000      | 176.00      | 294.00   | 152.0    | 44.5  | 345.4          | 299.7 | 228.6 | 309.9 | 152.4 | 8.1  |
| F8   | 2,149         | 3,583  | 1,700      | 296.00      | 493.00   | 184.0    | 62.2  | 402.6          | 354.1 | 266.7 | 373.4 | 184.2 | 8.1  |
| F9   | 3,145         | 5,242  | 1,450      | 433.00      | 722.00   | 228.5    | 73.7  | 453.6          | 403.9 | 304.8 | 462.3 | 228.6 | 8.1  |
| F10  | 4,838         | 8,064  | 1,300      | 666.00      | 1,111.00 | 254.0    | 95.3  | 504.8          | 453.9 | 355.6 | 513.1 | 254.0 | 8.1  |
| F11  | 7,903         | 13,249 | 1,165      | 1,088.00    | 1,825.00 | 279.0    | 101.6 | 585.0          | 499.1 | 381.0 | 565.2 | 279.4 | 9.4  |
| F12  | 11,060        | 18,433 | 960        | 1,523.00    | 2,539.00 | 336.5    | 101.6 | 694.7          | 605.8 | 469.9 | 590.6 | 292.1 | 9.4  |
| F13  | 21,890        | 36,867 | 700        | 3,015.00    | 5,077.00 | 406.0    | 177.8 | 879.3          | 762.0 | 609.6 | 566.4 | 279.4 | 12.7 |

※ Con.=Continuous / Int.=Intermittent  
DBSE=Distance Between Shaft Ends