


Flexible Flange Coupling

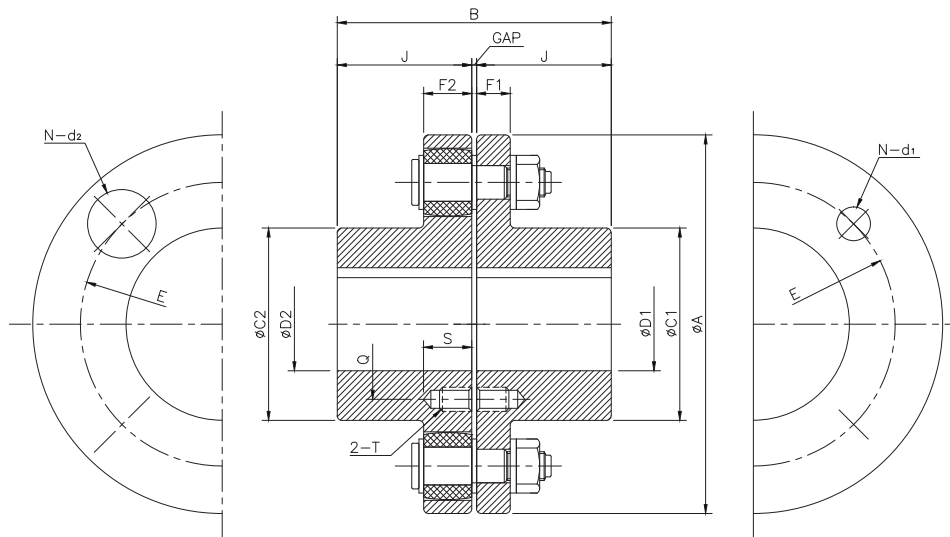

Size	Max. Speed RPM	Torque Rating (kg·m)	Bore Dia (mm)		Dimensions (mm)											Gap (mm)	Bolt Hole			Cplg wt (kg)	Size		
			Max.		Min.		A	B	C ₁	C ₂	E	F ₁	F ₂	J	Q		T	S	n			d ₁	d ₂
			D ₁	D ₂	D ₁	D ₂																	
90F	4,000	0.5	20	–	90	59	35.5	60	14	28	–	–	–	3	4	8	19	1.4	90F				
100F	4,000	1.0	25	–	100	74	42.5	67	16	35.5					4	10	23	2.1	100F				
112F	4,000	1.6	28	16	112	83	50	75	16	40					4	10	23	2.7	112F				
125F	4,000	2.5	32	28	18	125	93	56	50	85					18	45	4	14	32	3.5	125F		
140F	4,000	5.0	38	35	20	140	103	71	63	100					18	50	6	14	32	4.9	140F		
160F	4,000	11	45	25	160	115	80	115	18	56					8	14	32	6.8	160F				
180F	3,500	16	50	28	180	129	90	132	18	63					8	14	32	9.6	180F				
200F	3,200	25	56	32	200	146	100	145	22.4	71					8	20	41	13.2	200F				
224F	2,850	40	63	35	224	164	112	170	22.4	80					8	20	41	18.4	224F				
250F	2,550	63	71	40	250	184	125	180	28	90					8	25	51	26.0	250F				
280F	2,300	100	80	50	280	204	140	200	28	40	100	8	28	57	36.5	280F							
315F	2,050	160	90	63	315	228	160	236	28	40	112	140	M20	51	10	28	57	49.1	315F				
355F	1,800	250	100	71	355	255	180	260	35.5	56	125	140			8	35.5	72	74.9	355F				
400F	1,600	400	110	80	400	255	200	300	35.5	56	125	160			10	35.5	72	94.3	400F				
450F	1,400	630	125	90	450	285	224	355	35.5	56	140	180	M22	54	12	35.5	72	127.8	450F				
560F	1,150	1,000	140	100	560	325	250	450	35.5	56	160	200			14	35.5	72	206.3	560F				
630F	1,000	1,600	160	110	630	365	280	530	35.5	56	180	220			18	35.5	72	277.0	630F				

※ Coupling weight, without bore machining