Nail Making Machine

Specifications


Model: Nail Bank, B-4

Production Range

Nail	Single Wire (nm, inch)	Double Wire (mm, inch)	
Diameter	2.2 ~ 4.2 (.086 ~ .165)	2.2 ~ 3.05 (.086 ~ .120)	
(Allowance)	$\pm~2/100~\text{mm}$	± 1/100 mm	
Length	13 ~ 108 (½ ~ 4 ¼)	13 ~ 95 (½ ~ 3 ¾)	
Output	Max. 500	Max. 900	

Machine Features

- 1. Consistent High Speed Production of High Quality Nails
- 2. Precise Nail Heads by Using Powerful Hammer
- 3. Two Way Automatic Lubrication (Gear Oil and Lithium Grease to Produce Clean Nails)
- 4. Smart Brake for Anti-jamming in Nail Heading and Easy Release of Flywheel.
- 5. Common and Low Cost Spare Parts, Very Low Maintenance Cost
- 6. Sound Deadening Cover: Noise Less with Safety
- 7. Available Accessories Unit: Power Pay-Off, Nibless Conveyor
- 8. Touch screen computer controls.
 - * Space required: 2,400L x 1,500W x 1,200H in mm (8L x 5W x 4H in feet)
 - * Weight: approx. 3,000 kg (6,600lbs)
 - * Motor Inverter: 7.5 kW

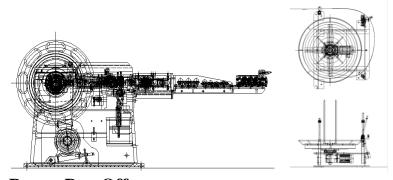

Power Pay-Off

Load Capacity	Max. 2,000 kg	Floor Space	1.6 x 1.6 m
Coil I.D	Min. 300 mm	Max. Coil Height	800 mm
Coil O.D	Max. 1,000 mm	Power	2 HP



ZEUS TECHNO INC.

FASTENER COLLATING SYSTEM

#103, Seongseo 4th Cheomdan Road. Dalseo-Gu, Daegu, 42824 Korea

Tel: 82-53-585-7128 / Fax: 82-53-585-7180

www.zeus-techno.com