



ER 콜렛의 치수표

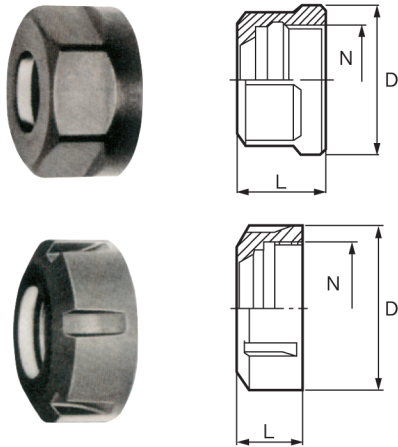

CODE NO	D	L	N	허용내경범위
U/M ER11	19	11.3	M14x0.75	Φ7
U/M ER16	28	17.5	M22x1.5	Φ10
U/M ER20	34	19.0	M25x1.5	Φ13


CODE NO	D	L	N	허용내경범위
U/M ER16	32	17.5	M22x1.5	Φ10
U/M ER20	35	19.0	M25x1.5	Φ13
U/M ER25	42	20.0	M32x1.5	Φ16
U/M ER32	50	22.5	M40x1.5	Φ20
U/M ER40	63	25.5	M50x1.5	Φ26

IEE-112(FORM F-3) EQUIV.CCT특성

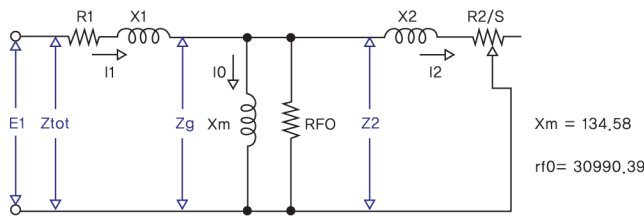

	Load	25.0	50.0	75.0	100.0	125.0	150.0
0	R2	2.2533	2.2546	2.2556	2.2565	2.2574	2.2582
1	Slip S	6.25E-03	0.01189	0.01780	0.02404	0.03071	0.03795
2	R2/S	360.33	185.57	126.75	93.878	73.514	59.512
3	X2	6.0146	6.0071	6.0011	5.9957	5.9907	5.9859
4	Z2^2	129875	35973	16102	8849.1	5440.2	3577.6
5	G2	2.77E-03	5.27E-03	7.87E-03	0.01061	0.01351	0.01663
6	Gfe	3.23E-05	3.23E-05	3.23E-05	3.23E-05	3.23E-05	3.23E-05
8	-B2	4.63E-05	1.67E-04	3.73E-04	6.78E-04	1.10E-03	1.63E-03
9	-BM	7.43E-03	7.43E-03	7.43E-03	7.43E-03	7.43E-03	7.43E-03
11	Y	6.38E-05	8.538E-05	1.23E-04	1.79E-04	2.56E-04	3.61E-04
12	Rg	44.006	61.771	64.071	59.456	52.856	46211
13	R1	2.0856	2.0856	2.0856	2.856	2.0856	2.0856
14	Rtot	46.091	63.857	66.156	61.542	54.942	48.298
15	Xg	117.23	88.514	63.252	45.303	33.292	25.241
16	X1	7.5151	7.5151	7.5151	7.5151	7.5151	7.5151
17	Xtot	124.72	6.00	70.732	52.778	40.761	32.705
18	Ztot	132.97	115.30	96.849	81.073	68.411	58.328
19	I1 A	2.8658	3.3049	3.9345	4.7001	5.57	6.5329
20	I2 A	0.57488	1.0859	1.6117	2.1563	2.7236	3.3204
21	Winp Kw	0.37584	0.69747	1.0241	1.3595	1.7046	2.0612
22	Slip Kw	0.35725	0.67059	0.98778	1.3095	1.636	1.9684
23	StCu Kw	0.01713	0.02278	0.03228	0.04607	0.06470	0.08901
24	Core Kw	4.16E-03	4.11E-03	4.05E-03	3.98E-03	3.91E-03	3.82E-03
25	RtCu Kw	2.23E-03	7.98E-03	0.01758	0.03147	0.05024	0.07469
26	F&W Kw	0.04564	0.04538	0.04511	0.04483	0.04452	0.04419
27	Stry Kw	9.40E-03	0.01723	0.02515	0.03317	0.04131	0.04958
28	Totl Kw	0.07856	0.09747	0.12417	0.15953	0.20467	0.26128
29	Wout Kw	0.29997	0.60000	0.89994	1.20	1.4999	1.7999
30	Eff %	79.245	86.025	87.875	88.266	87.993	87.324
31	Pf %	34.664	55.384	68.309	75.909	80.311	82.802
33	Rpm	17887	17786	17680	17567	17447	17317
34	TOQ Kgcm	1.9311	3.6249	5.3395	7.0783	8.8433	10.64

(1)LOAD CHARACTERISTICS

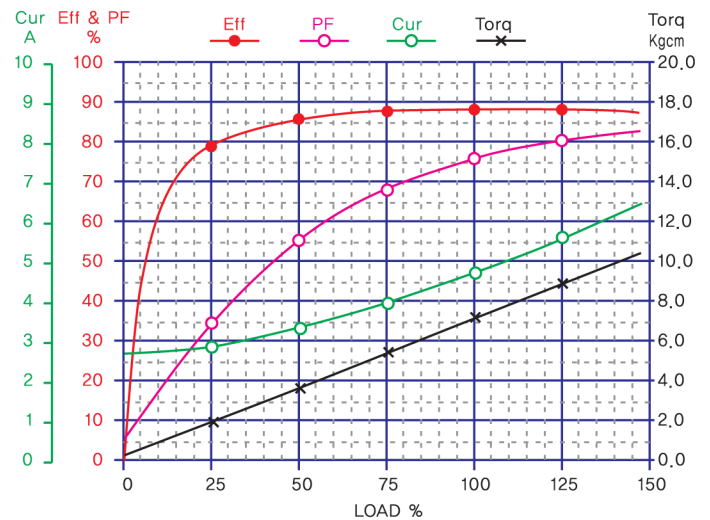

(2)SPEED CHARACTERISTICS

