

WebEye




제품특징

- iPhone/ Android Phone을 위한 Mobile Viewer
- MD/LH/EH/MH/HD 시리즈 제품군 지원
- 최대 16개의 DVR 지원
- 유동 IP 유닛 접속 기능
- QCIF/CIF/Half/D1/720p/1080p 해상도 지원
- 4분할 모니터링
- 최대 30fps 스트리밍
- PTZ 지원
- D-Zoom을 통해 HD 영상의 고화질 모니터링
- 시스템 로그 검색을 통한 유닛 상태 파악
- 이벤트 로그 검색을 통한 알람 상태 파악



Screen Shots

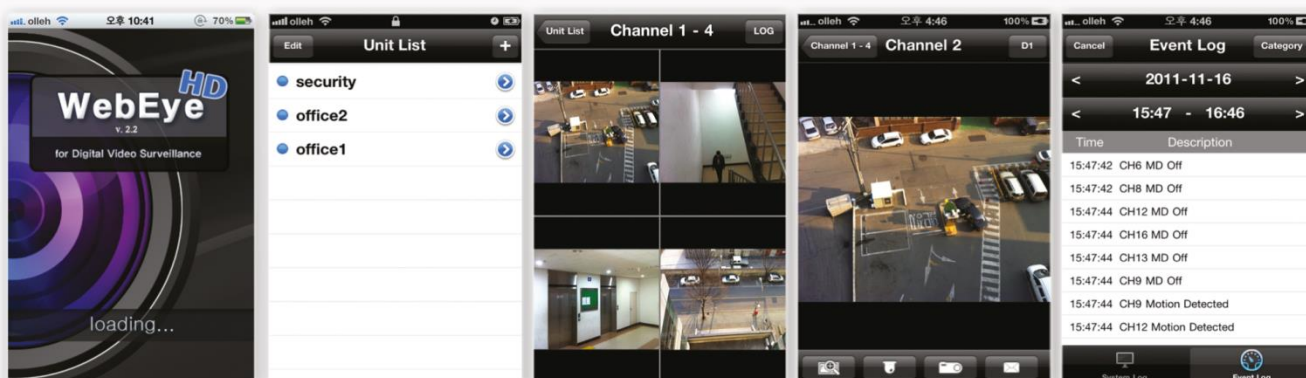

주요사양

iOS		Android
SUPPORT		
H/W	iPhone 3GS/4G, iPhone 5G, iPod Touch 3G/4G, iPad, iPad2	All Android Phones
OS	iOS 4.2 or higher	Android 2.3 or higher
Device	HD Series DVR LH/EH/MH Series DVR MD Series DVR WinRDS	HD Series DVR LH/EH/MH Series DVR MD Series DVR WinRDS
SERVER		
List manager	Add, Remove, Modify, Rearrange	Add, Remove, Modify, Rearrange
Address	IP, URL(DNS/DDNS), WRS	IP, URL (DNS/DDNS), WRS
Port	Support	Support
ID/Password	Support	Support
Discovery	TCP, WRS (up to 16)	TCP, WRS (up to 20)
VIDEO INPUT		
Protocol	WESP	WESP
Standard	NTSC, PAL, HD	NTSC, PAL, HD
Resolution	QCIF, CIF, HALF, D1, 720p, 1080p	QCIF, CIF, HALF, D1, 720p, 1080p
Compression	JPEG, H.264	JPEG, H.264
VIDEO DISPLAY		
Division	Single or Quad	Single or Quad
Frame rate	MAX CIF 30, Half 20, D1 7, 720P 4, 1080P 1, JPEG 1 fps (It depends on network)	
DIGITAL ZOOM		
Support	4X	4X
Thumbnail View	-	Support
PTZ		
Protocol	CGI call	WESP
Command	Zoom In/Out, Tilt Up/Down, Pan Left/Right	Zoom In/Out, Tilt Up/Down, Pan Left/Right
LOG		
Type	System Log, Event Log	System Log, Event Log
Protocol	WESP	WESP
Search	Date (Event Log - Date + Time)	Date (Event Log - Date + Time)
System log filter	Nothing	Nothing
Event log filter	Status&Action "CH Pre Alarm Start", "CH Post Alarm Stop", "CH Recording Start", "CH Recording Stop", "Manual Recording Start", "Manual Recording Stop", "Unknown Code"	Status&Action "CH Pre Alarm Start", "CH Post Alarm Stop", "CH Recording Start", "CH Recording Stop", "Manual Recording Start", "Manual Recording Stop", "Unknown Code"
	Text "Text Input"	Text "Text Input"
	Motion "Motion Detected", "MD Off"	Motion "Motion Detected", "MD Off"
	Alarm "Sensor On", "Sensor Off", "CH Network Event On", "CH Network Event Off", "CH Site Connected", "CH Site Disconnected", "CH Site Disconnected(Cont.)", "CH No Video", "CH Video Detected", "Bookmark"	Alarm "Sensor On", "Sensor Off", "CH Network Event On", "CH Network Event Off", "CH Site Connected", "CH Site Disconnected", "CH Site Disconnected(Cont.)", "CH No Video", "CH Video Detected", "Bookmark"
Limited	Up to 1000	Up to 1000