

MVUR-2400

Video UTP Receiver



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Description

- Video UTP Receiver enables to send video signals from Video Transmitter (MVUT-100) through UTP to Composite Video signals.

Features

- Video Output supports NTSC/PAL. UTP Cable used CATEGORY 5,5E,6 types. Transmitter and receiver are needed to be connected point-to-point and controlled RS-485 signal for PAN/TILT through UTP cable so it's not necessary to install extra cable.
- Camera connection is composed of 24 channels. Upon extensional installation required, it is made easy through link.

Panel Drawing



Specifications

- General Part
 - Video Input Port : 24Ch
 - Data Input Port : 24Ch
 - Video Output Port : 24Ch / loop out 24Ch
 - Data Output Port : 1Ch (link out 1Ch)
 - Video/Data : 1000m
 - Video Input : Balanced Differential Signal 100 Ω , RJ-45
 - Video Output : 1Vp-p Composite Video 75 Ω , NTSC/PAL, RCA Connector
 - Cable : UTP category 5, 5e, 6 AWG24-4P
 - Internal Operation Frequency : 200MHz, -3dB

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MVUR-2400

Video UTP Receiver




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Specifications

- Case & Power Part
 - Power source : AC 220V 60Hz /1A
 - Temperature : 0°C ~ 40°C
 - Weight : 11.8Kg
 - Type : 19" rack type
 - Dimensions : 483(W) * 176(H) * 338(D) mm

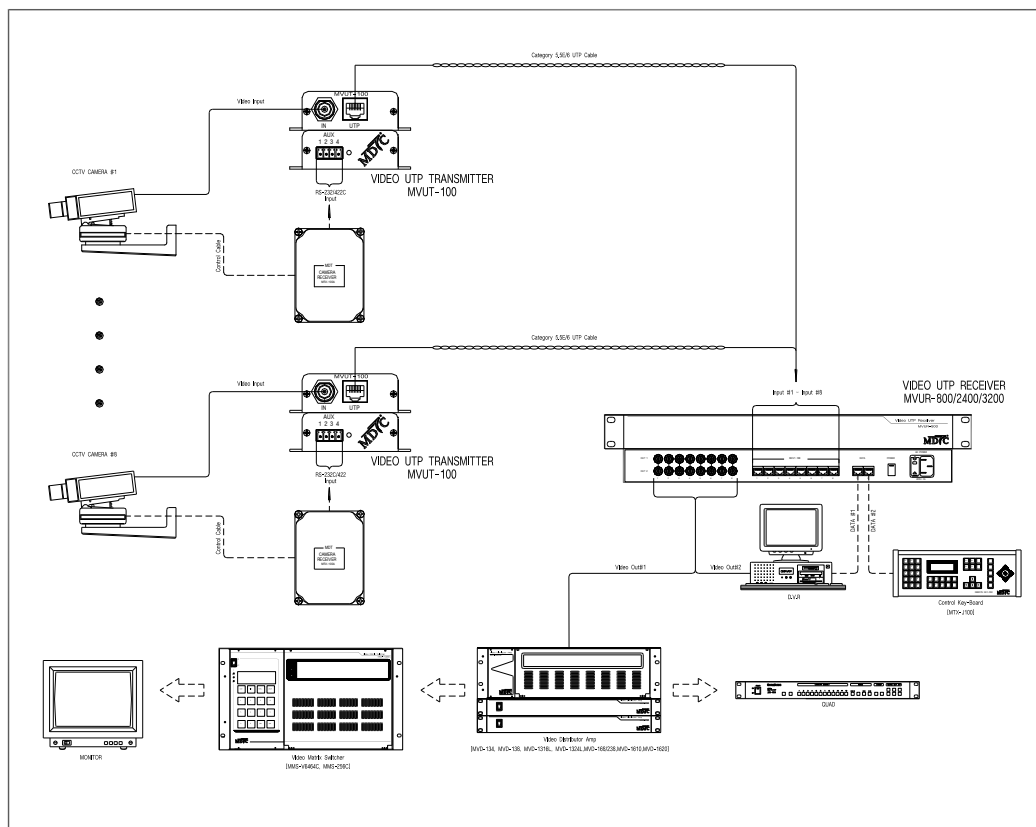

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217