

MALT-1600

Audio Detector



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>


Description

- Audio Detector generates Alarm sound once it detects any abnormality of audio signal and confirms the signal level.

Features

- Detects 8 audio channels (L/R)
- Level Meter Function for each channel on the front LED
- Remote setting is available for audio level & time.
- Memory back-up function helps to memorize the last status while it is turned off.
- Alarm will be sounded once it detects any problem on audio signal.
- Audio distribution function is also available. (1 in x 2 out)

Panel Drawing

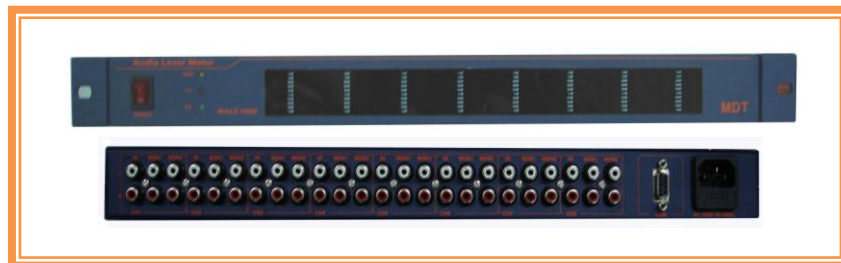

Specifications

- General Part
 - Input / Output : Stereo Unbalanced, 2.2Vp-p $\pm$ 1%
 - In / Out Impedance : 600 Ω
 - In / Out Connector : RCA
 - Noise Level : more than -70dB
 - Crosstalk : more than -80dB (20Hz ~ 20KHz)
- Case & Power Part
 - Power source : AC 85 ~ 240V 50 ~ 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : below 25Watt
 - Type : 19" Rack Type
 - Dimensions : 483(W) * 44.5(H) * 300(D) mm

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217