

MVD-1632

Video Distributor Amp



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>


Description

- Video Distribution Amplifier takes one analog video signal and then amplifies, spilt it to 6 video analog signals.
- Accepts an analog video signal by simple operation and distributes 3 analog video signals with 2 channels.

Features

- Its outstanding feature provides low frequency loss with minimum noise.
- Video gain generators enable to regulate the signal for leveling.
- Setting video output
 - 1 In 6 out 1 channel Setting : Move jumper-pins to No.1 & 2
 - 1 In 3 out 2 channel Setting : Move jumper-pins to No.2 & 3

Panel Drawing

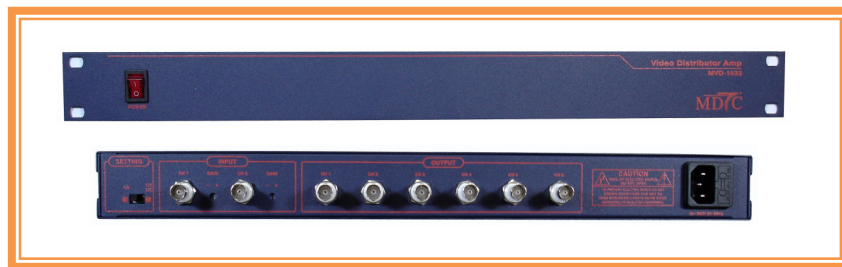

Specifications

- Video Part
 - Input/Output number : 1in x 6out or 1in x 3out x 2ch
 - Input/Output type : composite video 1Vp-p, 75ohm
 - Input/Output connector : BNC
 - The gain : 45IRE ~ 185IRE
 - Frequency response : $\pm 0.1\text{dB}$ (750KHz ~ 4.7MHz)
 - Crosstalk : below 60dB
 - S/N : below 65dB

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MVD-1632

Video Distributor Amp




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

- Case & Power Part
 - Power source : AC 220V, 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : below 10Watt
 - Type : 19" Rack Type
 - Dimensions : 483(W) * 44.5(H) * 300(D) mm

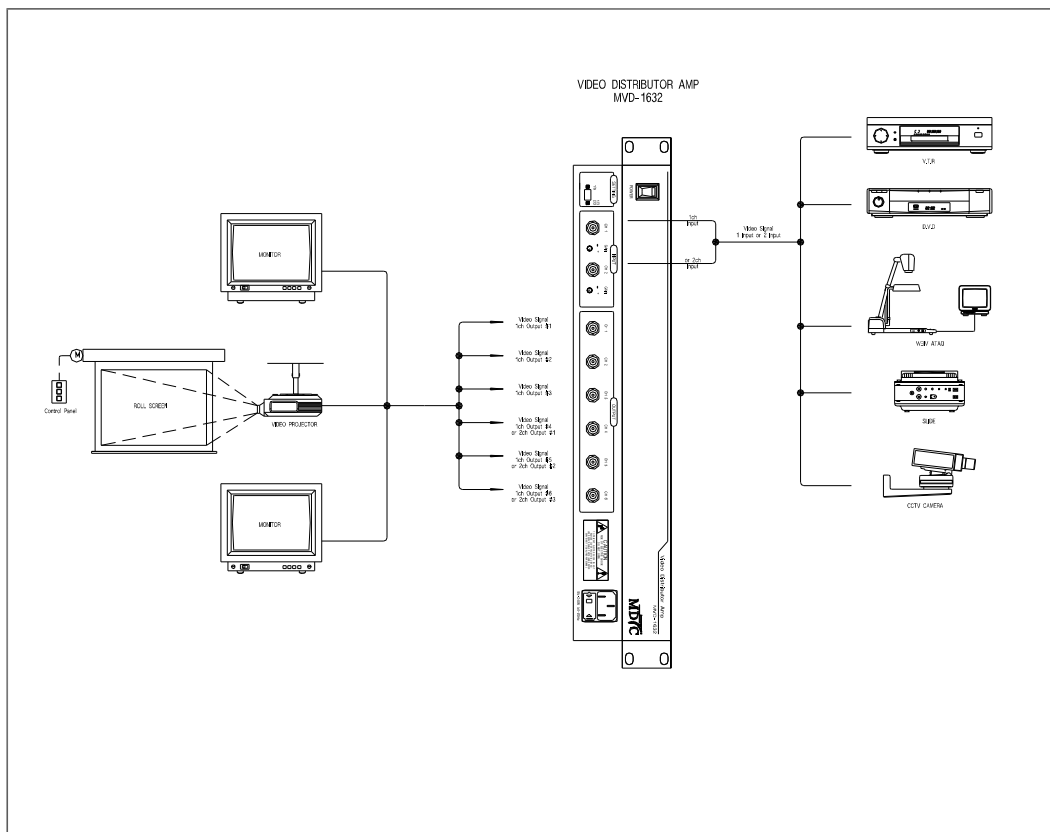

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217