

MRD-108

RGB Distributor Amp



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Description

- This is a one input, 8 output R.G.B.H.V distribution amplifiers.

Features

- It distributes each out to different R.G.B.H.V display devices such as projector, RGB SW etc.
- Its outstanding feature provides low frequency loss with minimum noise.
- ON / OFF Switch is available in front of the device. D-sub Connector at input/output terminal makes operation easy.

Panel Drawing



Specifications

- Video Part
 - Input/Output number : 1 x 8
 - Input/Output type : RGBHV
 - Input/Output connector : d-sub 15pin
 - Input/Output level : analog RGB : 1.2Vp-p Max, H-Sync, V-Sync : TTL level
 - Input/Output impedance : 75Ohm $\pm$ 1%
 - Bandwidth : 600 MHz (-3 dB), fully loaded

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MRD-108

RGB Distributor Amp




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

○ Case & Power Part

- Power source : AC 220V 60Hz $\pm 10\%$
- Temperature : 0°C ~ 40°C
- Power consumption : below 20Watt
- Type : 19" Rack type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

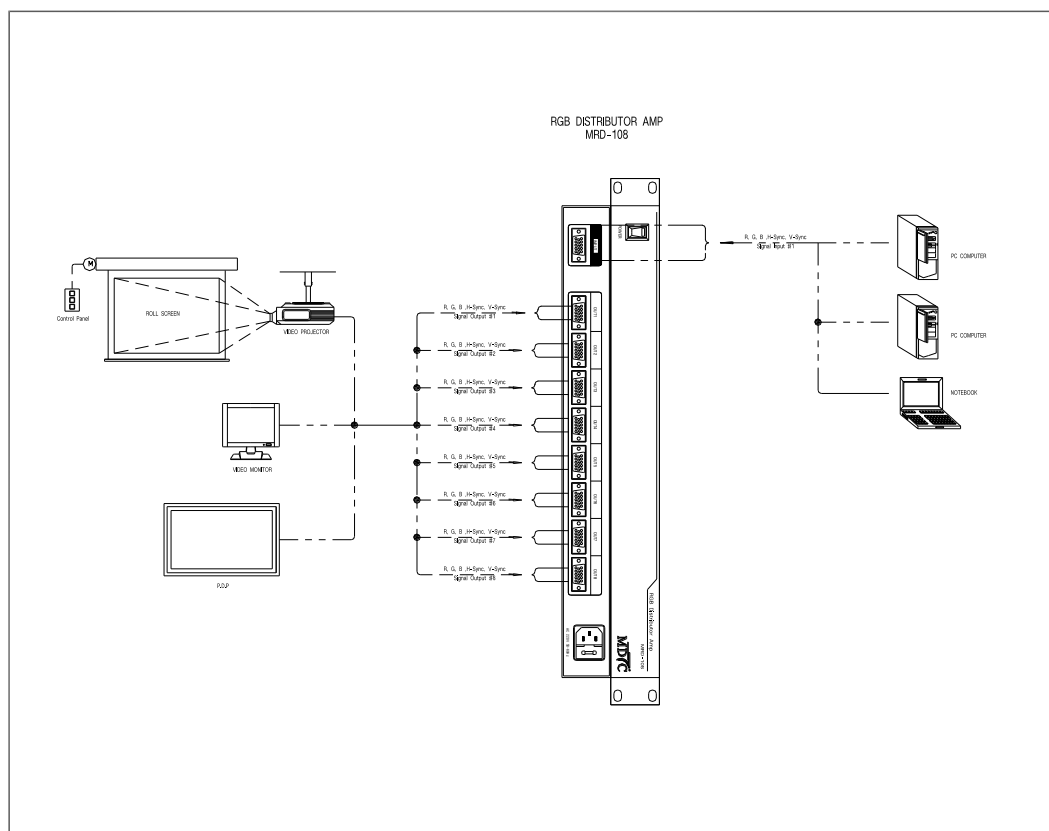

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217