

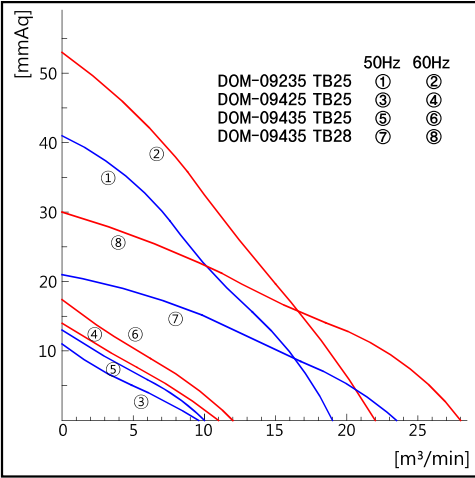


External Motor

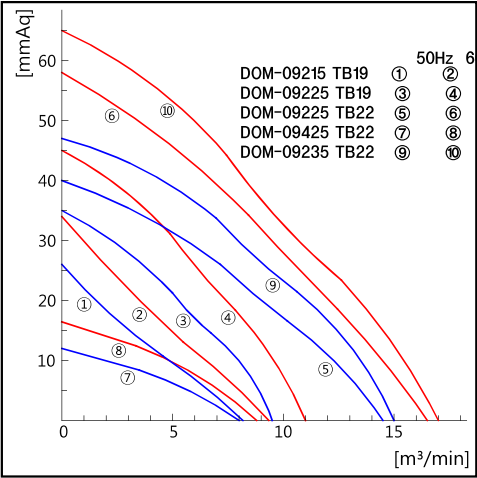


제품명 Model	전원 Source (V)	날개크기 Impeller Size (cm)	주파수 Fre- quency (Hz)	전류 Currecnt (A)	소비전력 Power Input (W)	회전수 Revolution per minute (RPM)	극수 Pole (P)	최대풍량 Air Volume (CMM) (CFM)	최대정압 Air Pressure (mmAq) (pa)	중량 Weight (kg)
DOM-09215TB19	1Ø 220V	19	50	0.40	78	2,345	2	8.2 290	26 255	1.8
		60	60	0.37	80	2,685		9.4 330	34 335	
DOM-09225TB19	1Ø 220V	19	50	0.45	93	2,690	2	9.5 335	35 345	2
		60	60	0.46	102	3,090		11 390	45 440	
DOM-09225TB22	1Ø 220V	22	50	0.50	100	2,500	2	14.5 510	40 390	2
		60	60	0.58	125	2,680		16.5 585	58 570	
DOM-09425TB22	1Ø 220V	22	50	0.18	37	1,380	4	8 280	12 120	2
		60	60	0.19	41	1,600		8.8 310	16.5 160	
DOM-09235TB22	1Ø 220V	22	50	1.00	180	2,720	2	15 530	47 460	2.2
		60	60	0.90	200	3,180		17 600	65 640	
DOM-09235TB25	1Ø 220V	22.5	50	1.00	180	2,560	2	19 670	41 400	2.2
		60	60	0.97	215	2,930		22 775	53 520	
DOM-09425TB25	1Ø 220V	22.5	50	0.18	38	1,320	4	9.7 345	11 110	2
		60	60	0.16	45	1,500		11 390	14 135	
DOM-09435TB25	1Ø 220V	22.5	50	0.43	75	1,420	4	10 355	13 125	2.2
		60	60	0.37	80	1,685		12 425	17.5 170	
DOM-09435TB28	1Ø 220V	28	50	0.28	63	1,245	4	23.5 830	21 205	2.7
		60	60	0.45	95	1,500		28 990	30 295	

◆ 50/60Hz 별도 생산품 : DOM-09435TB28

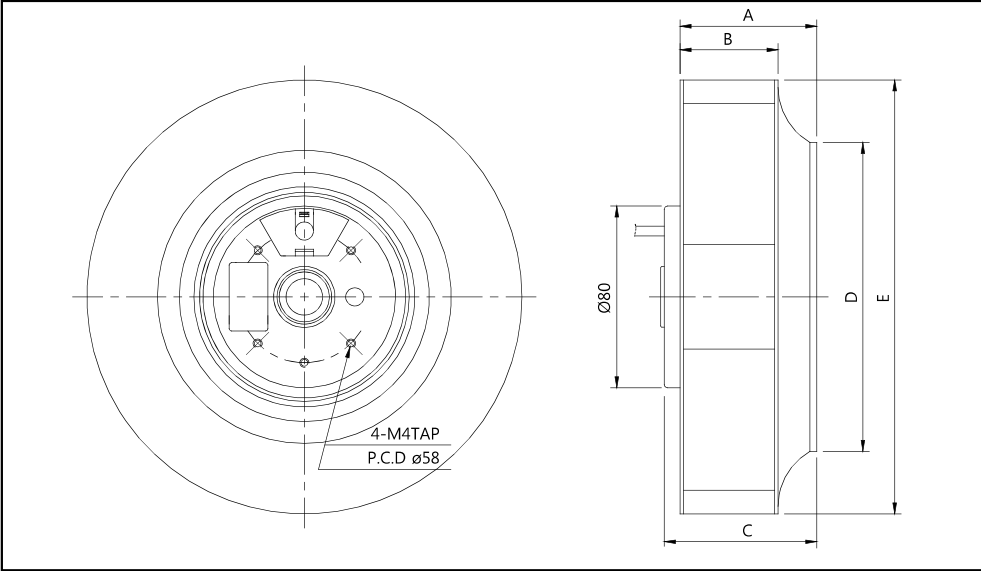

Dimension (mm)					
Model	A	B	C	D	E
DOM-09215TB19,09225TB19	60	43	67	Ø136	Ø191
DOM-09225TB22,09425TB22	63	50	74	Ø160	Ø220
DOM-09235TB22					

Dimension (mm)					
Model	A	B	C	D	E
DOM-09425TB25,09235TB25	88	64	101	Ø156	Ø225
DOM-09435TB25					
DOM-09435TB28	81	51.5	102	Ø192	Ø280

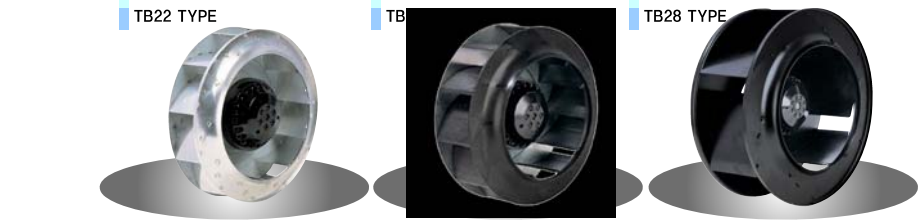

◆ 제품 특징

- 날개 역선이 긴 Backward curved impeller를 사용하여 공기유동역학적으로 매우 높은 효율 특성.
- 소형과 및 경량화 하여 협소한 장소에 설치 및 취급이 용이.
- Motor와 일체화된 구조로써 매우 얇은 (Compact & Slim)외형으로 사용 대상기기의 유용한 공간절약 (Space saving)효과
- 모터는 일반적으로 소형 모터로서 단상에 적합하며 주문에 의해서 삼상으로도 제작이 가능.

◆ 제품 사용장소

- 환기 system용 - 빌딩 지하상가 등 일반 환기용
- 공기조화, 급 배기용

◆ Features

- Very high efficiency using long backward curved impeller.
- Small size and light body is ideal for narrow space and easy to handling.
- Ultra-compact slimline units made of integrated motor and casing used extensively in industrial sector, where space is at a premium.
- The motor is suitable to single phase, but it is possible to manufacture three phases as per order.

◆ Available place

- Ventilating system - Building, Underground arcade,
- Air Conditioning, Exhausting and Air supplying.