

일반형 가스미터



G1.6




G2.5




G4.0

구 분		G1.6	G2.5	G4.0
최대유량(Qmax) - m ³ /h		2.5	4.0	6.0
최소유량(Qmin) - m ³ /h		0.016	0.025	0.040
1주기 체적 - dm ³ /rev		0.5/0.8	0.8	1.2
최대 표시량 - m ³		99999.999		
최소 표시량 - m ³		0.0002		
중량 - Kg		1.7	1.7	1.8
사용 압력 - KPa		50		
흐름 방향		좌 · 우형		
접 속 관		유니온(PT 3/8")		
입 출구 나사산		M34X1.5P		
정밀도	Qmin ≤ Q < 0.1Qmax	±3.0%		
	0.1Qmax ≤ Q < Qmax	±1.5%		

가스미터 성능곡선

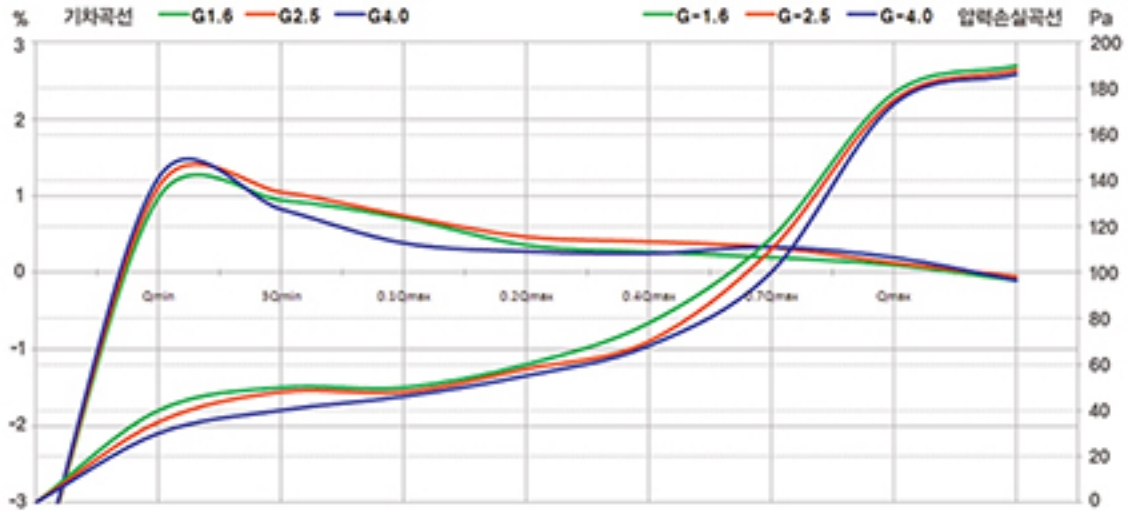


가스미터 외형치수

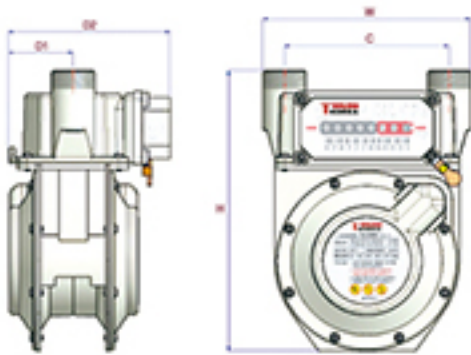

단위mm

구분/규격		G1.6	G2.5	G4.0
높이	H	224	224	242
넓이	W	164	164	164
중심거리	C	130	130	130
폭	D1	51	51	55
폭	D2	128	128	136

유니온 치수

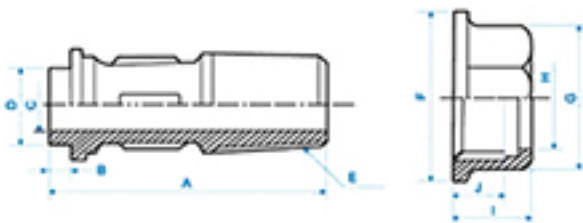

UNION PIPE				
A	B	C	D	E
49.5	4	20	23.5	PT3/4

UNION NUTS				
F	G	H	I	J
40	35	28	16	13.5