

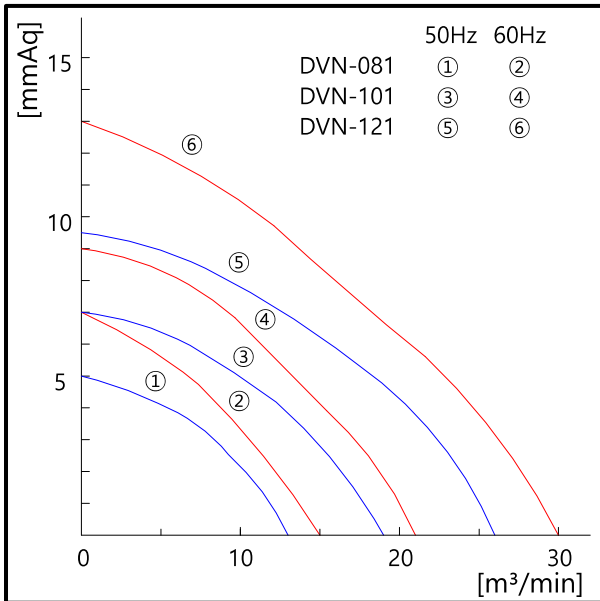


| 제품명<br>Model | 전원<br>Source | 날개크기<br>Blade<br>Size<br>(cm) | 주파수<br>Fre-<br>quency<br>(Hz) | 전류<br>Current<br>(A) | 소비전력<br>Power<br>Input<br>(W) | 회전수<br>Revolution<br>per minute<br>(RPM) | 모터출력<br>Motor<br>Output<br>(KW) | 극수<br>Pole | 최대풍량<br>Air<br>Volume<br>(CMM) (CFM) | 최대정압<br>Air<br>Pressure<br>(mmAq) (pa) | 중량<br>Weight<br>(kg) |           |     |
|--------------|--------------|-------------------------------|-------------------------------|----------------------|-------------------------------|------------------------------------------|---------------------------------|------------|--------------------------------------|----------------------------------------|----------------------|-----------|-----|
| DVN-081      | 1Ø 220V      | 20                            | 50<br>60                      | 0.22<br>0.22         | 43<br>43                      | 1,425<br>1,680                           | 0.01                            | 4          | 13<br>15                             | 460<br>530                             | 5<br>7               | 50<br>70  | 2.5 |
| DVN-101      | 1Ø 220V      | 25                            | 50<br>60                      | 0.24<br>0.26         | 47<br>53                      | 1,320<br>1,520                           | 0.02                            | 4          | 19<br>21                             | 670<br>740                             | 7<br>9               | 70<br>90  | 3   |
| DVN-121      | 1Ø 220V      | 30                            | 50<br>60                      | 0.25<br>0.28         | 50<br>55                      | 1,280<br>1,495                           | 0.02                            | 4          | 26<br>30                             | 920<br>1,060                           | 9.5<br>13            | 95<br>125 | 3.4 |

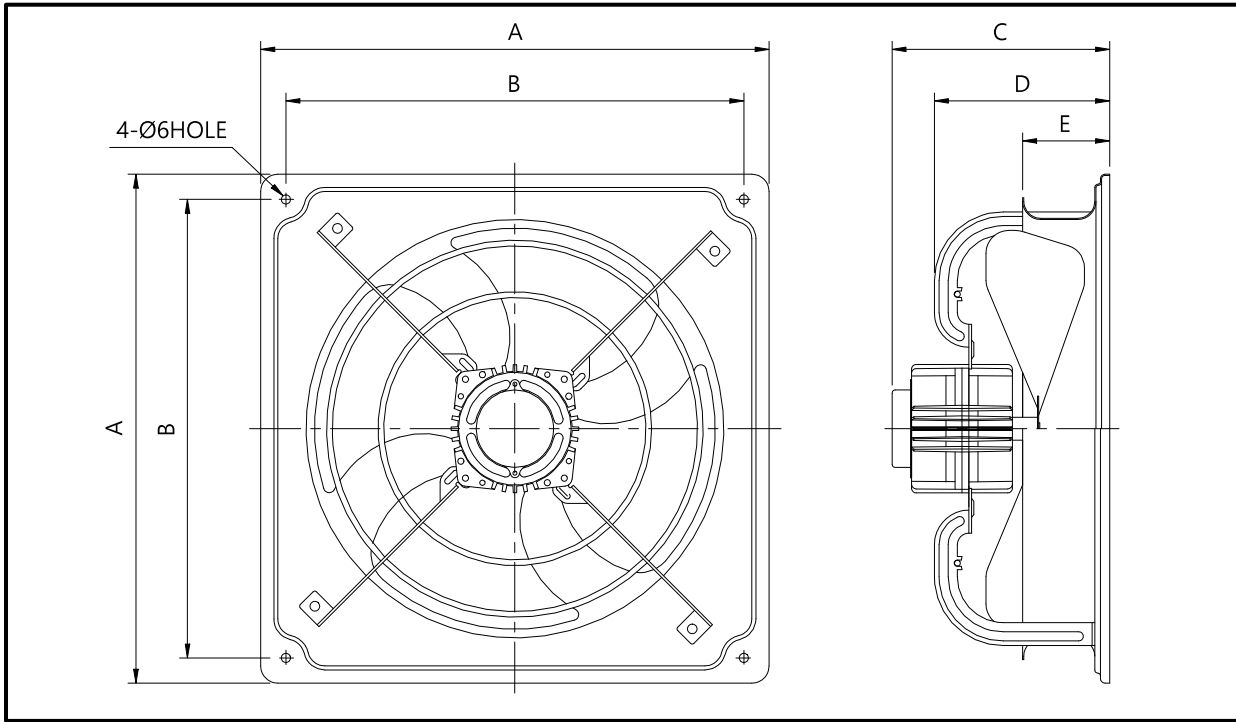

## Dimension

| Model   | A   | B   | C   | D   | E  |
|---------|-----|-----|-----|-----|----|
| DVN-081 | 300 | 275 | 135 | 131 | 55 |
| DVN-101 | 350 | 325 | 151 | 147 | 70 |
| DVN-121 | 400 | 370 | 151 | 147 | 70 |



### ◆ 제품 특징

- 벨마우스 타입으로 흡입과 배출효과를 극대화한 제품
- 견고하고 내구성을 향상시킨 대풍량, 저소음의 유압식 환풍기
- 설치 상태에서 모터와 날개의 분리가 가능해 점검 및 보수용이
- 타사 제품과 비교시 전력소모가 적으며 최대의 효율 발휘
- 밀폐형 모터 사용으로 제품 수명이 길다
- 알미늄 다이캐스팅 모터케이스 채택으로 냉각효과 극대화
- 자동형 SHUTTER를 부착 가능

### ◆ 제품 사용장소

- 공장, 창고, 상점 등의 환기 및 급배기
- 축사, 비닐하우스 등의 환기 및 급배기
- 공조설비용 : 빌딩, 아파트, 지하상가, 공장, 창고 등의 일반환기, 공기조화, 냉난방송풍, 급배기용
- 각종 기기조립 및 기기냉각용 : 변압기, 건조기, 정류기 등

### ◆ Feature

- Enhance ventilating and blow with bell mouthed type.
- Enhance the durability. High air volume, Low noise oil pressure system ventilator.
- Blade is possible to be detached from motor after installation. Easy for inspection or repair.
- Low consumption electric power and the greatest efficiency compare to other products.
- hermetic motor. Long longevity.
- Enhance the cooling ability with aluminum die casting motor case.
- Possible to apply auto shutter.

### ◆ Available place

- Ventilating and exhausting of factory, warehouse, store.
- Ventilation and exhausting of cattle shed, green house
- Refrigeration and cooling system : Ventilation, Blowing, Exhausting in the building, apartment, underground arcade, factory, warehouse
- Assembling and cooling : Transformer, drying machine, rectifier, etc.