


WIRING DIAGRAM

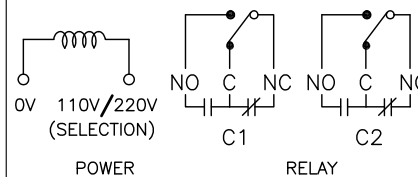

## DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	1(Max.)	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 80	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	AC110V/220V ±10, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
OUTPUT	1 DPDT		
VISCOSITY	1Pa.s/10P Less		
MOISTURE	Max 80%RH		
L	■ 300 mm(STD)		
	□ OPTION (      mm ) Max. 5000mm		
TAG NO.	-		

## NOTES

## REVISION

9	HEAD	ADC12	1		
8	CONNECTION PIPE	304SS	1		
7	FLANGE		1		
6	PROTECTION PIPE		1		
5	INSULATOR	UHMW-PE	1		
4	WIRE HOUSING		1		
3	WIRE CLIP	SS400	3		
2	WIRE ROPE				
1	MEASURING ROD		1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

## BILL OF MATERIAL

CUSTOMER	-			
PROJECT	-			
TITLE	CAPACITANCE TYPE LEVEL SWITCH SCAP-4-A-1-B-3-A-1 ASSEMBLY DRAWING			
MANUFACTURER	SeoJin Instech Co., Ltd.			
SCALE	1:1	ERP CODE	0000	Work Order No. -
REV.	N/S	DWG NO.	SJ-M024-DWG-AP015	△

△					
△					
△					
△					
△	FOR APPROVAL				
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED