SJ-M011-DWG-AP007

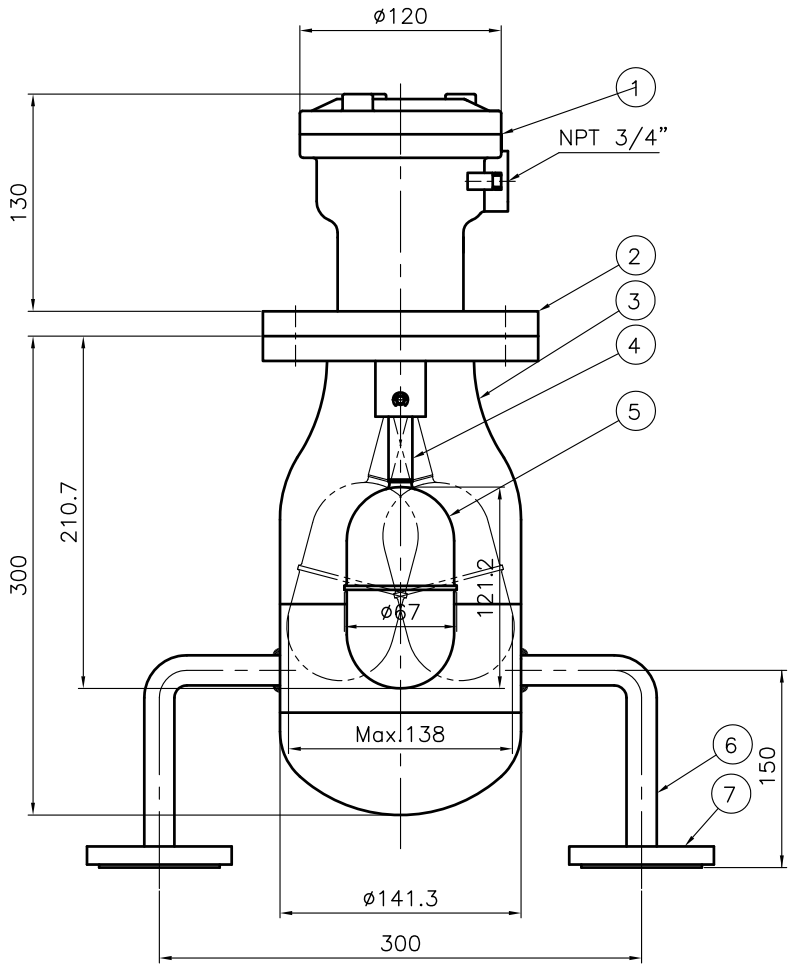



DESIGN DATA

CODE		N/A	
UNIT		mm	
KIND OF FLUID		–	
PRESS.	DESIGN	10(Max.)	Kg/Cm²
	OPERATING	–	Kg/Cm²
TEMP. (SENSOR)	DESIGN	−20 ~ 60	°C
	OPERATING	–	°C
TEMP. (ELECTRONICS)	DESIGN	−20 ~ 60	°C
	OPERATING	–	°C
CONTACT RATING		250V AC, 10A	
POWER SUPPLY		–	
ENCLOSURE		WEATHER PROOF	
SP.GR		0.7(Min.)	
OUTPUT		1SPDT	
VISCOSITY		1Pa.s/10P Less	
MOISTURE		Max 80%RH	

TAG NO.	–

NOTES

REVISION

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
7	FLANGE	316SS	1	1" ANSI 150# RF	
6	PIPE	316SS	1	SCH.20 1"	
5	FLOAT	316SS	1		
4	SHAFT	316SS	1		
3	CHAMBER	316SS	1		
2	FLANGE	AC2B	1	3" ANSI 150# RF	
1	TERMINAL BOX	AC2B	1		

BILL OF MATERIAL

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△0					
△					
△					
△					
△					

CUSTOMER: –

PROJECT: –

TITLE: Magnetic Float Type Level Switch
SHM-100-B-1-A-1-B-1
ASSEMBLY DRAWING

MANUFACTER: SeoJin Instech Co.,Ltd.

SCALE	ERP CODE	Work Order No.	REV.
N/S	0000	–	△0

DWG NO. SJ-M011-DWG-AP007