


WIRING DIAGRAM

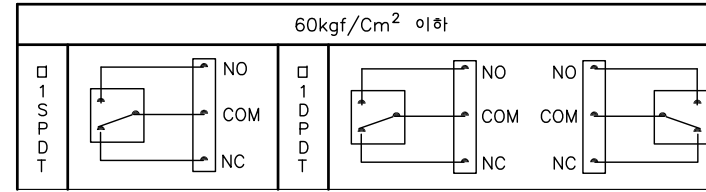

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	80(Max.)	Kg/Cm ²
	OPERATING	-	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	-25 ~ 350	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-25 ~ 120	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 10A		
POWER SUPPLY	-		
ENCLOSURE	EXPLOSION PROOF Ex d IIC T6 / IP65		
SP.GR	0.6(Min.)		
OUTPUT	1SPDT		
VISCOSITY	1Pa.s/10P Less		
MOISTURE	Max 80%RH		
FLANGE	ANSI 5" 600# RF		

NOTES

REVISION

11	SOCKET	304SS	1		
10	HEX BOLT	304SS	1		
9	RADIATION PLATE	AL	3		
8	FLOAT ASS'Y		1		
7	FLOAT PIPE		1		
6	FLANGE	304SS	1		
5	NAME PLATE	AL	1		
4	BODY ASS'Y		1		
3	CONNECTION PIPE "A"		1		
2	HOUSING	ADC12	1		
1	HOUSING COVER	AC2B	1		

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-				
PROJECT	-				
TITLE	MAGNETIC FLOAT TYPE LEVEL SWITCH SHM-2000 ASSEMBLY DRAWING				
MANUFACTURER	SeoJin Instech Co., Ltd.				

SCALE	ERP CODE	Work Order No.	REV.
N/S	0000	-	
DWG NO.	SJ-M012-DWG-AP007		

△					
△					
△					
△					
△	FOR APPROVAL	2020.12.08	S.J.I.	D.N.	S.H.L.
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	APPROVED