

# Volume Booster TS100 Series

- Precise and fast response
- Soft seats provide tight shut off
- Adjustable Sensitivity
- Speed up valve regulation



# Volume Booster TS100 Series

#### Description

Volume Booster TS100 is one-to-one Signal to output supply Air, when used with a positioner/actuator, it is a control device to increase the stroking speed of control valves.

#### Features



TS100




TS110




TS120

- → Precise and fast response
- → Soft seats provide tight shut off
- + Adjustable Sensitivity
- → Options available (High and Low temperature)
- → Speed up valve regulation

#### Installation examples

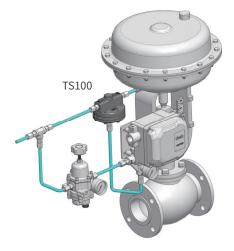

Single actuator

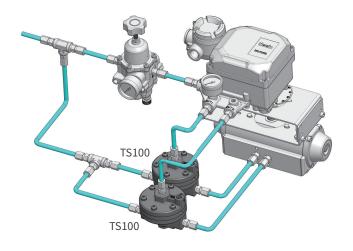


Double actuator

### Specifications

Model		TS100	TS110	TS120
		TESS Annual Science Control of Co	WHOM SOUTH WAS AND A SOUTH WAS	And the state of t
Max supply pressure		1MPa	1MPa	1MPa
Signal and output pressure		0.14~0.7MPa	0.14~0.7MPa	0.14~0.7MPa
Signal to output ratio		1:1	1:1	1:1
Linearity		1%	1%	1%
Flow capacity (CV)	Exhaust	1.3	2.1	5.2
	Output	1.2	2.7	4.9
Signal port		NPT1/4, PT1/4	NPT1/4, PT1/4	NPT1/4
Supply / Output port		NPT1/4, PT1/4	NPT1/2, PT1/2	NPT3/4
	Standard type	-20°C~70°C	-20°C~70°C	-20°C~70°C
Ambient temperature	High Temp.	-20°C~120°C	-20°C~120°C	-20°C~120°C
	Low Temp.	-40°C~70°C	-40°C~70°C	-40°C~70°C
Material		Aluminum die cast	Aluminum die cast	Aluminum die cast
Weight		0.55kg	0.75kg	1.9kg

#### ■ Materials of construction

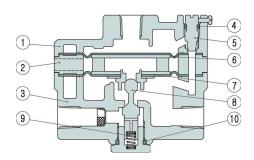

No.	Title	Material	No.	Title	Material	
1	Cover	ALDC12	6	Diaphragm upper	NBR	
2	Ring exhaust	ALDC12	7	Ass'y diaphragm	AL/NBR	
3	Body	ALDC12	8	Poppet	STS	
4	O-ring	NBR	9	Spring seat	STS	
5	Adjust screw	STS	10	O-ring	NBR	

#### Product code

Model				
Supply / Output port	1/4"	TS100		
	1/2"	TS110		
	3/4"	TS120		
Air connection type	NPT		N	
	PT		Р	
Ambient temperature	-20°C~70°C			S
	-20°C~120°C			Н
	-40°C~70°C			L
	-60°C~70°C			U



## Tissin Co.,Ltd. (주)티씬

201-1105, No 397, Seokchen-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea 14449

Tel:+82-32-624-4573, Fax:+82-32-624-4574

www.tissin.co.kr



Version: PC-100EN\_01/2022