


## » Applications 용 도

- General Industrial (일반 산업용)
- Factory drainage (공장배수용)
- Rain water drainage (빗물배수용)
- Agriculture (농업용)

## » Feature 특징

- Capacity:  $\sim 500\text{m}^3/\text{min}$
- Head :  $\sim 5\text{m}$
- Size:  $\sim 200\text{mm}$

The technology of **CW-HYDRO** is not limited to profit of the enterprise but it is the nurture of dreams through rendering services to the customer.

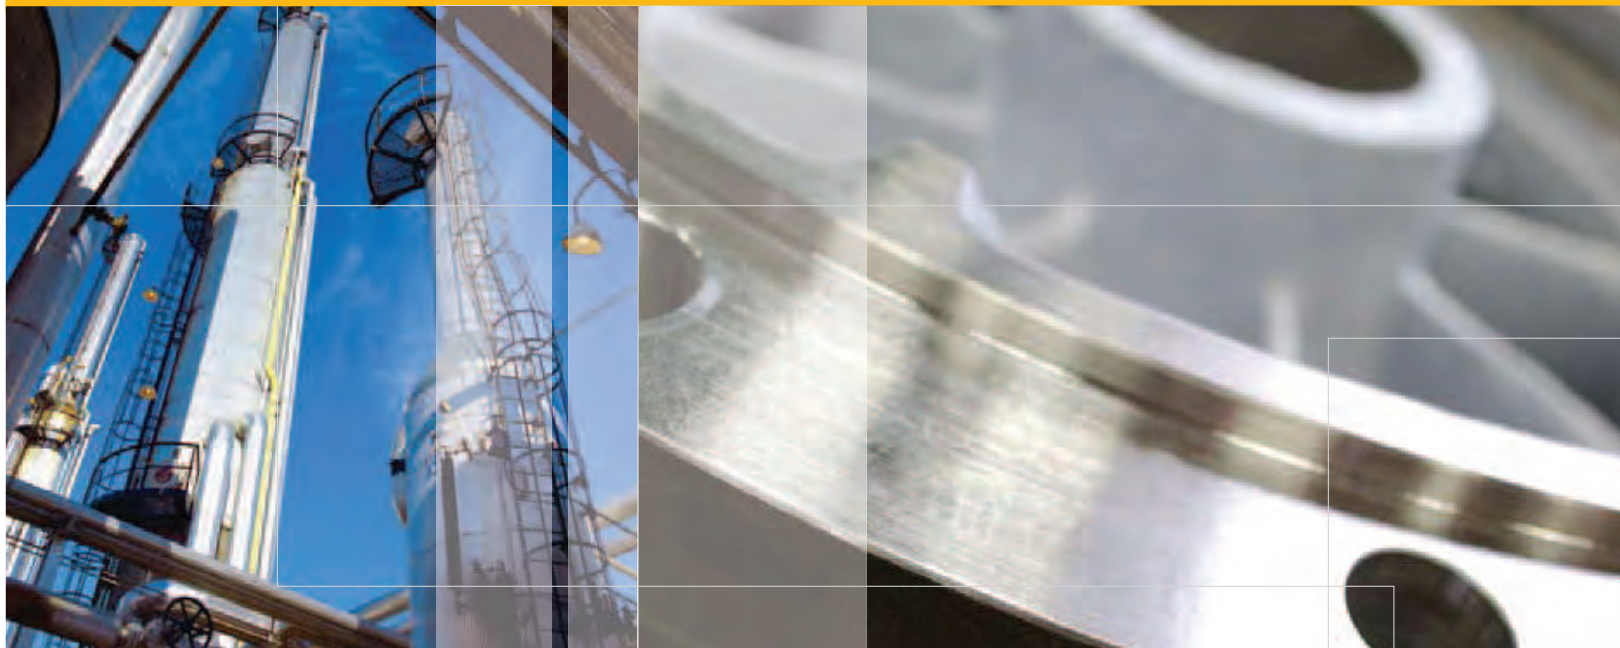

# Specification

VA



구분 규격	POWER	유량(m <sup>3</sup> /min)	양정(m)	회전수 (rpm)
400	7.1	15	1.5	520
	10.7	19	2.0	580
	14.7	22	2.5	650
	17.2	24	3.0	720
500	9.5	21	1.5	420
	12.7	24	2.0	490
	17	27	2.5	550
	22	32	3.0	600
600	12.8	29	1.5	360
	17.6	34	2.0	460
	23.5	39	2.5	410
	29.5	44	3.0	510
700	17	40	1.5	300
	23	46	2.0	350
	31	52	2.5	400
	39	60	3.0	440
800	22	53	1.5	260
	31	62	2.0	310
	40	70	2.5	350
	51	80	3.0	380
900	29	70	1.5	230
	39	80	2.0	270
	51	90	2.5	300
	65	100	3.0	330
1000	35.5	90	1.5	200
	48	100	2.0	240
	65	115	2.5	270
	82	130	3.0	300
1100	42.5	105	1.5	190
	59	125	2.0	220
	78	140	2.5	240
	101	160	3.0	270

구분 규격	POWER	유량(m <sup>3</sup> /min)	양정(m)	회전수 (rpm)
1200	49.6	125	1.5	170
	68	145	2.0	200
	94	170	2.5	220
	120	190	3.0	240
1300	56	145	1.5	160
	79.5	170	2.0	180
	108	195	2.5	210
	140	220	3.0	230
1400	63	163	1.5	150
	91	195	2.0	170
	121	220	2.5	190
	156	250	3.0	210
1500	72	190	1.5	140
	101	220	2.0	160
	135	250	2.5	180
	174	275	3.0	200
1600	80	210	1.5	130
	115	250	2.0	150
	154	280	2.5	170
	200	320	3.0	190
1700	86	230	1.5	120
	126	280	2.0	140
	172	320	2.5	160
	225	360	3.0	180
1800	100	270	1.5	120
	143	315	2.0	140
	192	360	2.5	140
	250	400	3.0	170
2000	123	325	1.5	110
	171	380	2.0	120
	235	440	2.5	130
	303	490	3.0	150

## Selection Charts

