

Desco Inc.(HQ/Manufacturer)

HEAD OFFICE: 1240-1, Ok-Dong, Gwangsan, Gwangju, Korea

TEL: 82.62.952.4564 / FAX: 82.62.953.1593

EXPORT DIVISION

2607 jidong, Lottecastle, 76, Soongin-Dong, Jongno-Gu, Seoul, Korea

TEL: 82-2-3670 6400 / FAX: 82-2-3670 6399

E-mail: desco@desco-inc,com





DS CARRIER DSC-800










DS Carrier 800 (Middle-class for carrier)

- * Full hydraulic system
- * Loading capacity 8 ton \sim 12 ton
- * Gradeability 30° (55%)
- * DS carrier can be used as power pack
- * Easy to mobile, easy to trun and rides on rubber tracks for less surfact disturbance
- * All instrument & control levers are concentrated.
- * Options mud pump, inverter, rod crane, self-loading system, pre-heating system, wireless remote control and so on

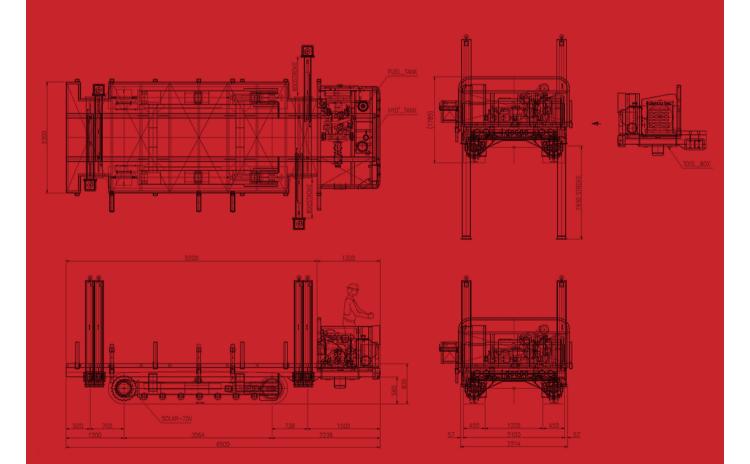

If you want the kind of drill rigs, DESCO INC. is at your solution and service.

DESCO INC. is at your solution and service.



TECHNICAL SPECIFICATION

Dimens		

Net weight	4.5 ton
Width	2.1M
Length (mast folded / unfolded)	6.5M
Height (mast folded / unfolded)	2.4M

Engine

Engine	
Engine model	Hyundai D4DA
Engine power	100HP@1800rpm
Cooling system	Water
Fuel tank	80 Liters
Electrical system	24V DC

Hydraulic system

Try drading by brown		
General	Single variable displacement pump, pressure & flow controlled	
Pump model	K3V63*2 (2 pumps)	
Hydraulic tank	100 Liters	
Operating pressure	280 Bar	

Crawler base Doosan model (Steel)

Clawler base	Doosali illodei (Steel)
Model	Solar 75V
Crawler Speed	Max. 4km/h
Loading capacity	8.Oton
Gradeability	30 ^o (55%)

Auxiliary hydraulic ports (for power pack)

Optional list

- · Rod Crane (1.5ton ~ 5.5ton)
- · Mud pump
- Inverte
- Jacks & Riggers : Self-loading system
- · Preheating system
- · Wireless remote travel
- · Steel track with rubber pad

Notice

As your optional list, engine, hyd. system, cralwer and so on can be changed and design of drill rigs can be changed. Specifications are general and subject to change without notice. Due to selected options, delivered equipment may not necessarily match that shown.