



5 SNAP SWITCH

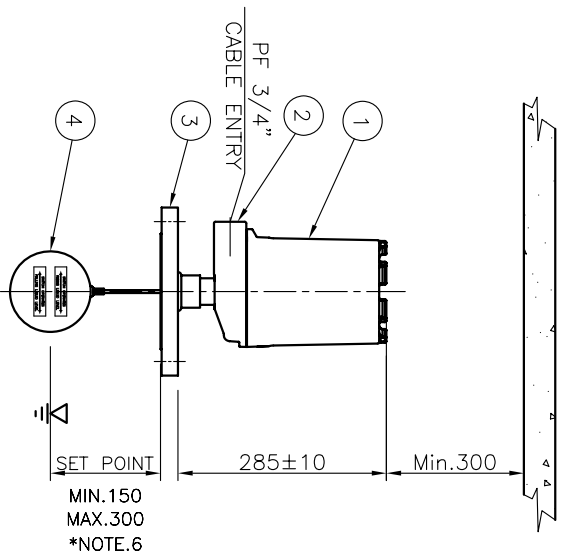

WIRING DIAGRAM

DESIGN DATA

CODE	KEPIC MGE & ASME B31.1
UNIT	mm
ENCLOSURE	Ex d IIC T6
ORDERING CODE	PROCESS TEMP (CONTACT RATING)
1	Max.120°C (10A 120V AC / 0.6A 125V DC)
2	Max.230°C (5A 250V AC / 0.5A 125V DC)
3	Max.400°C (1A 250V AC / 1A 30V DC)
4	Max.230°C (15A 250V AC / 1A 125V DC)
	PC, PHENOL,304SS
	PC, CERAMIC,304SS
	PC, CERAMIC,304SS
	PC, CERAMIC,304SS
	PC, CERAMIC,304SS

NOTES

1. REFER TO INSTALLATION MANUAL
2. WHEN YOU SET IT UP
2. CABLE SIZE : MAX.14 AWG.
3. DEAD BAND IS 15mm FIXEDLY
4. HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
5. CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
6. IF SET POINT EXCEED 300mm, PLEASE CONTACT SEOJIN.

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPPR. PRESS. MAX.(Bar)	OPPR. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

OR	OPENS ON RISING LEVEL
CR	CLOSES ON RISING LEVEL
OF	OPENS ON FALLING LEVEL
CF	CLOSES ON FALLING LEVEL
V	SWITCH ACTION

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△					
△					
△					
△					
△					

TITLE
VERTICAL FLOAT TYPE LEVEL SWITCH
SMC-75F-1-A-1-A-1-B-1
ASSEMBLY DRAWING

MANUFACTURER

Seojin Instech Co., Ltd.

SCALE	UNIT	REV. CODE	Rev. Order No.	REV.
N/S	mm	SJ-MO15-DWG-AP002-B	-	-