

Triple IR Flame Detector

40/40I


SharpEye

The new 40/40I, a multi spectrum based on three IR bands (IR3), detects fuel and gas fires at long distances with the biggest immunity to false alarms.

The 40/40I IR3 can detect a 1 ft² (0.1m²) gasoline pan fire at 215 ft (65m) in less than 5 seconds.

The 40/40I is the most durable and weather resistant flame detector currently on the market. Its new features include a heated window, to eliminate condensation and icing; HART capabilities for digital communications; lower power requirements; and a compact, lighter design.

Due to increased reliability, the 40/40 Series warranty period has been extended to 5 years and is SIL2 (TUV) approved to IEC 61508.

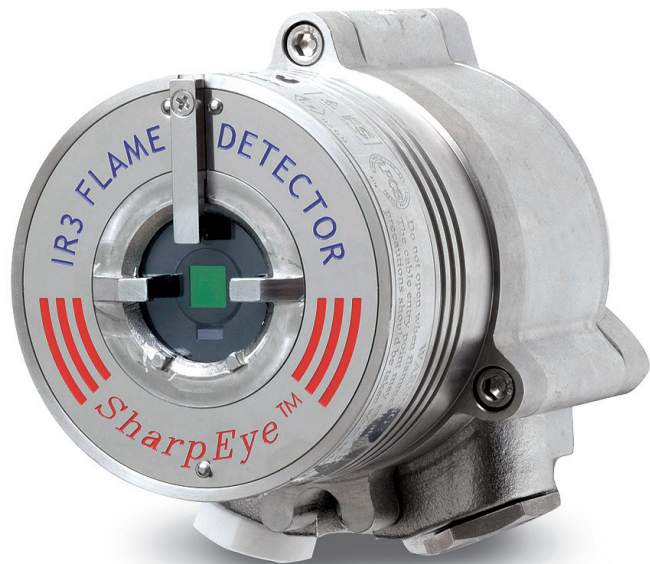

FEATURES & BENEFITS

- Multi spectrum design—for long distance detection and high false alarm immunity
- Sensitivity selection—to ensure no zone crossover detection
- Automatic and Manual Built-In-Test (BIT)—to assure continued reliable operation
- Heated window—for operation in harsh weather conditions (snow, ice, condensation)
- Multiple output options for maximum flexibility and compatibility
 - Relays (3) for Alarm, Fault and Auxiliary
 - 0–20mA (stepped)
 - Hart Protocol for maintenance and asset management
 - RS-485, Modbus Compatible
- High Reliability—MTBF—minimum 150,000 hours
- Approved to Safety Integrity Level 2 (SIL2-TUV)
- 5-Year Warranty
- User Programmable via HART or RS-485

Accessories



Simulators
Up to 9m



Tilt Mount
Wall Mount bracket



Duct Mount
In high temperatures



U-Bolt/Pole Mount
2" ~ 3" Pipe mounting



Laser Pointer
Optimizing detector location



Air shield
Using under tough environmental conditions



Weather Protector
Protecting the detector from rain and snow




Mini Laptop Kit
Re-configure settings or perform diagnostics



USB RS485 Harness
Re-configure settings or perform diagnostics

Dimension (Unit:mm)

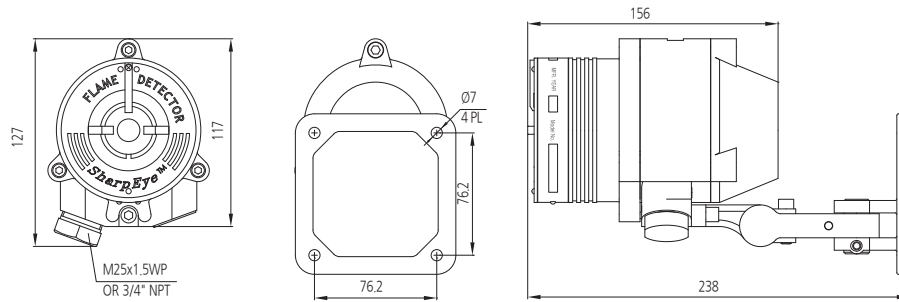

GENERAL SPECIFICATIONS

Spectral Response	Three IR Bands					
Detection Range (at highest Sensitivity Setting for 1ft ² (0.1m ²) pan fire)	Fuel	ft / m	Fuel	ft / m	Fuel	ft / m
	n-Heptane	215 / 65	Kerosene	150 / 45	Methane*	100 / 30
	Gasoline	215 / 65	Ethanol 95%	135 / 40	LPG *	100 / 30
	Diesel Fuel	150 / 45	Methanol	115 / 35	Polypropylene Pellets	16 / 5
	JP5	150 / 45	IPA (Isopropyl Alcohol)	135 / 40	Office Paper	33 / 10
	* 20" (0.5m) high, 8" (0.2m) width plume fire					
Response Time	Typically 5 seconds					
Adjustable Time Delay	Up to 30 seconds					
Sensitivity Ranges	4 Sensitive ranges for 1ft ² (0.1m ²) n-heptane pan fire from 50 ft (15m) to 215 ft (65m)					
Field of View	Horizontal 100°; Vertical 95°					
Built-in-Test (BIT)	Automatic (and Manual)					
Temperature Range	Operating: -67°F to +167°F (-55°C to +75°C)		Option: -67°F to +185°F (-55°C to +85°C)		Storage: -67°F to +185°F (-55°C to +85°C)	
Humidity	Up to 95% non-condensing (withstands up to 100% RH for short periods)					
Heated Optics	To eliminate condensation and icing on the window					

ELECTRICAL SPECIFICATIONS

Operating Voltage	24 VDC nominal (18-32 VDC)
Power Consumption	Standby: Max. 90mA (110mA with heated window) Alarm: Max. 130mA (160mA with heated window)
Cable Entries	2 x 3/4" - 14NPT conduits or 2 x M25 x 1.5 mm ISO
Wiring	12 - 22AWG (2.5mm ² - 0.3mm ²)
Electrical Input Protection	According to MIL-STD-1275B
Electromagnetic Compatibility	EMI/RFI protected to EN61326-3 and EN61000-6-3
Electrical Interface	The detector includes twelve (12) terminals with five (5) wiring options (factory set)

OUTPUTS

Relays	Alarm, Fault and Auxiliary SPST volt-free contacts rated 2A at 30 VDC
0-20mA (stepped)	Sink (source option) configuration Fault: 0 +1mA Warning: 16mA ± 5% BIT Fault: 2mA ± 10% Alarm: 20mA ± 5% Normal: 4mA ± 10% Resistance Loop: 100-600Ω
HART Protocol	Optional HART communications on the 0-20mA analog current (FSK) - used for maintenance, configuration changes and asset management, available in mA source output wiring options
RS-485	RS-485 Modbus compatible communication link that can be used in computer controlled installations

MECHANICAL SPECIFICATIONS

Materials	- Stainless Steel 316L with electro polish finish
Enclosure options	- Heavy duty copper free aluminum (less than 1%), red epoxy enamel finish (not available in FM version)
Enclosure options	Stainless Steel 316L with electro polish finish
Mounting	Detector 101.6 x 117 x 157 mm
Dimensions	Detector (St.St.) 6.1 lb (2.8 kg) Tilt mount 2.2 lb (1.0 kg) Detector, aluminum 2.8 lb (1.3 kg)
Environmental Standards	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical Shock, High Temp, Low Temp
Water and Dust	IP66 and IP67 per EN60529, NEMA 250 6P

APPROVALS

Hazardous Area	ATEX and IECEx Ex II 2 GD, Ex de IIC T5 (Ta -55°C to +75°C) Ex de IIC T4 (Ta -55°C to +85°C) Ex tD A21 IP66/X7 T 95°C Ex tD A21 IP66/X7 T 105°C
	FM/FMC/CSA Class I Div. 1, Groups B, C & D Class II/III Div. 1, Groups E, F & G
Performance	EN54-10 (VdS) FM3260
Reliability	IEC61508 - SIL2 (TUV)
Marine	MED 'Wheelmark' approval (DNV)

ACCESSORIES

Fire Simulator	20/20-310	U-Bolt/Pole Mount	789260-2 (2" pole)	Mini Laptop Kit	777820	Laser Pointer	777166
Tilt Mount	40/40-001		789260-1 (3" pole)	Weather Protector	777163	(Detector area coverage)	
Duct Mount	777670	USB RS485 Harness Kit	794079-5	Air Shield	777161		