




Anti Vibration Mountings

Type LOM

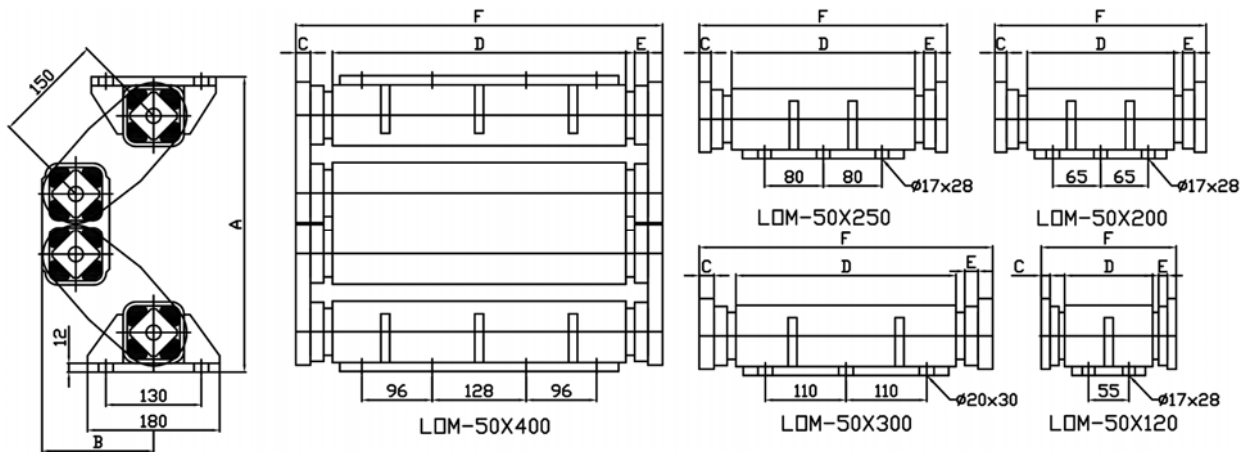


Size	G	A Un-loaded	A Max-loaded	B Un-loaded	B Max-loaded	C	D	E	F
LOM 50×120	2500-6000	400	300	152	182	12	120	12	184
LOM 50×200	4200-10000	400	300	152	182	16	200	16	288
LOM 50×250	5200-12300	400	300	152	182	16	250	16	338
LOM 50×300	6200-15000	400	300	152	182	20	300	18	400
LOM 50×400	8300-19500	400	300	152	182	20	400	18	500

* G = Load capacity in N

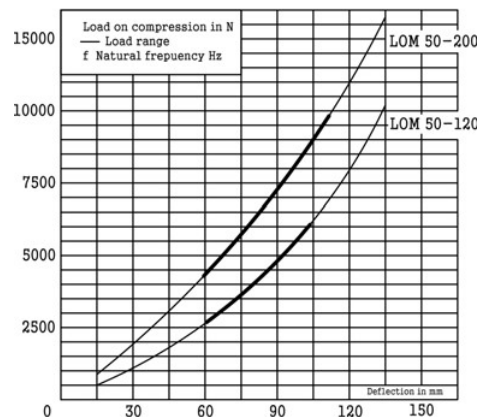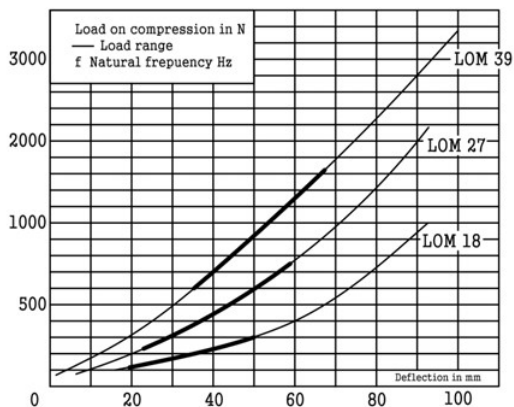

본 도면은 LAUTEC CO. 의 비밀자산으로서 LAUTEC CO.의 서면동의 없이 일부나 전부가 공개되거나, 복제되거나 복사되지 않아야 합니다. 특허, 저작권 등의 모든 권리가 보호되어 있습니다.

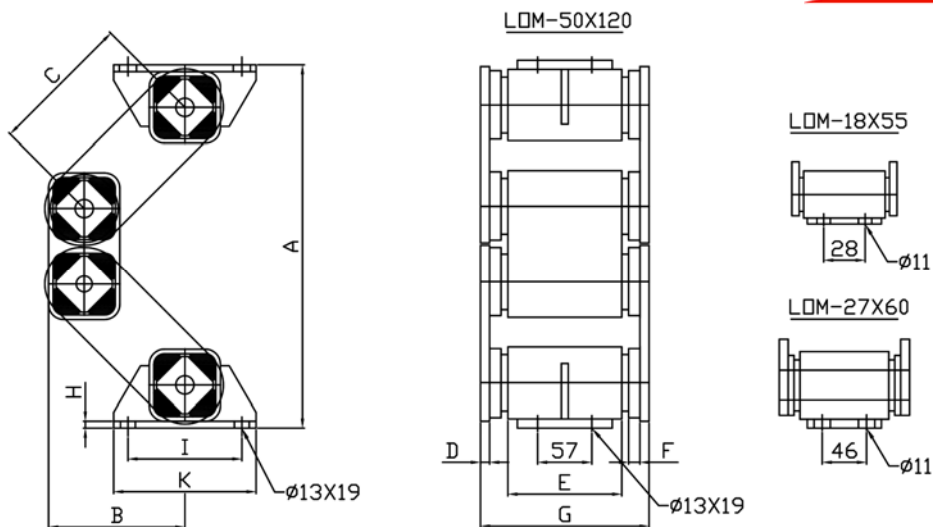



Size	G	A Un-loaded	A Max-loaded	B Un-loaded	B Max-loaded	C	D	E	F	G	H	I	K
LOM 18×55	120-320	214	160	87	107	100	5	55	0	71	4	60	80
LOM 27×60	250-800	244	184	94	114	100	6	60	4	88	5	80	105
LOM 39×100	670-1800	321	250	120	144	125	8	100	10	148	8	105	135
LOM 39×120	800-2160	321	250	120	144	125	8	120	10	148	8	105	135


G = Load capacity in N per mount

Material Structure

Cd	LOM 18	LOM 27	LOM 39	LOM 50×120	LOM 50×200	LOM 50×250	LOM 50×300	LOM 50×400
수직	18	40	70	190	320	390	470	630
수평	14	25	35	85	140	175	210	280



* Cd= Dynamic spring valve in N/mm, in nominal load range at Ne = 960 min-1, sw= 8mm

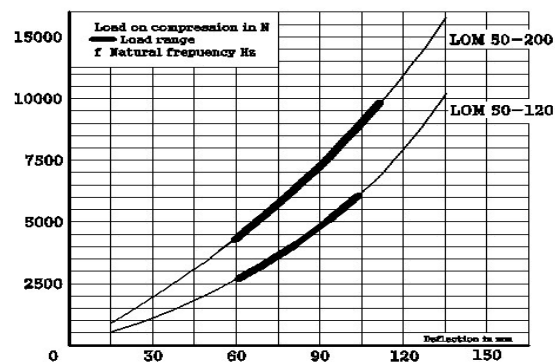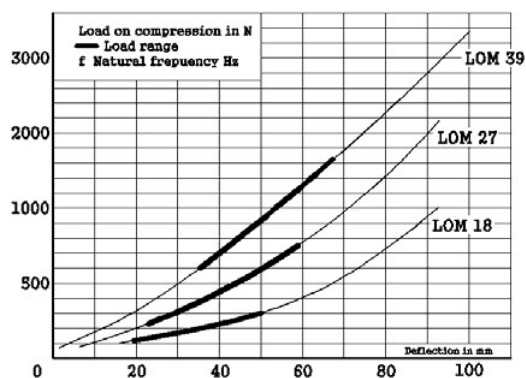

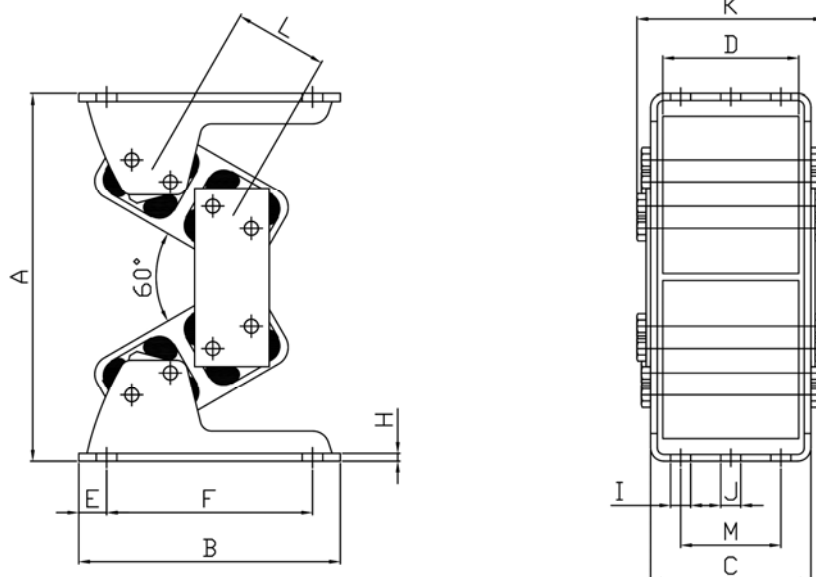

Size	G	A Un-loaded	A Max-loaded	B	C	D	E	F	H	I	J	K	L	M	무게 (kg)
LOM 18×55	500-1200	139	119	115	61	50	12.5	90	4	9	9	74	31	30	1.4
LOM 27×60	1000-2500	186	159	150	93	80	15	120	5	9	11	116	44	50	3.0
LOM 39×100	2000-4000	245	210	185	118	100	17.5	150	6	11	13.5	147	60	70	7.8
LOM 50×120	4000-9000	330	279	235	142	120	25	185	8	13.5	18	166	78	90	22.0
LOM 50×160	8000-12000	330	279	235	186	160	25	185	8	13.5	18	214	78	90	25.5
LOM 50×200	11000-16000	330	279	235	226	200	25	185	8	13.5	18	260	78	90	29.0

* G = Load capacity in N per mount

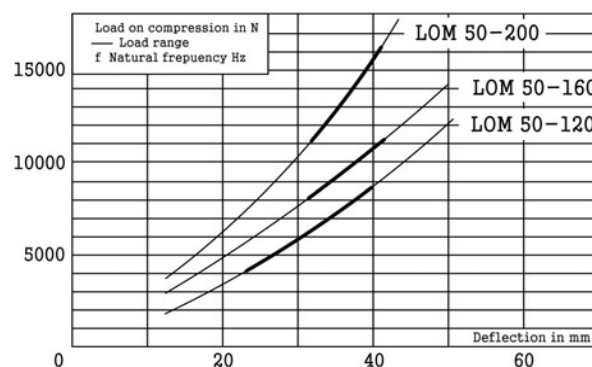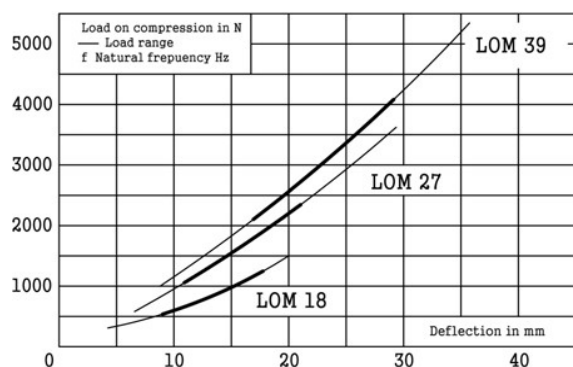

본 도면은 LAUTEC CO. 의 비밀자산으로서 LAUTEC CO.의 서면동의 없이 일부나 전부가 공개되거나, 복제되거나 복사되지 않아야 합니다. 특허, 저작권 등의 모든 권리가 보호되어 있습니다.