
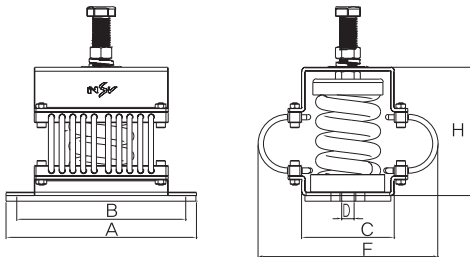


# VWM51 / VWM52 Wire-Spring Mount(Deflection: 25mm, 50mm)

※ The model name of VWA product has changed to VWM51

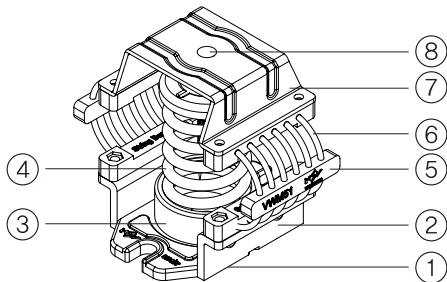

## ■ Features

VWM51 offers elasticity of coil spring and excellent attenuation effect of wire rope, ensuring vibration isolation and dynamic stabilization of equipment.  
Enhanced strength of wire mount helps bear large loads  
Enhanced strength of wire mount helps bear large loads

## ■ Usage

- ◆ For equipment that requires vibration isolation and dynamic stability
- ◆ For equipment that needs a buffer
- ◆ For reciprocating compressors and steam blowers
- ◆ For equipment that needs to control noise directing the floor right below

## ■ Specification

No.	Name of Components	Material	Standard
1	Lower Non Skid Pad	CR	KS M 6617
2	Lower Housing	SS400	KS D 3503
3	Spring Seat	CR	KS M 6617
4	Coil Spring	SUP9	KS B 2402
		HSW3	KS B 2403
5	Retainer Bar	E-Plastic	-
6	Wire Rope	STS304	KS D 3514
7	Upper housing	SS400	KS D 3503
8	Level Bolt	SS400	KS B 1002

## ■ Dimension & Selection Guide

Type	Capacity (kgf)	Spring Constant (kgf/mm)	Color	Dimension(mm)						
				A	B	C	D	E	H	Leveling Bolt
VWM51-100	100	4	Blue	138	108	89	13	170	145	M16×80
VWM51-150	150	6	Brown							
VWM51-200	200	8	White							
VWM51-300	300	12	Orange							
VWM51-400	400	16	Pink							
VWM51-500	500	20	Green	192	162	112	13	180	165	M16×80
VWM51-600	600	24	Blue							
VWM51-750	750	30	Black							
VWM51-1000	1000	40	Yellow							
VWM51-1200	1200	48	Red							
VWM51-1500	1500	60	Brown	216	186	139	13	200	185	M16×80
VWM52-100	100	2	Blue							
VWM52-150	150	3	Brown							
VWM52-200	200	4	White							
VWM52-300	300	6	Orange							
VWM52-400	400	8	Pink							
VWM52-500	500	10	Green							
VWM52-600	600	12	Blue							
VWM52-750	750	15	Black							
VWM52-1000	1000	20	Yellow							
VWM52-1200	1200	24	Red							
VWM52-1500	1500	30	Brown							

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.