


HYDRAULIC CHUCK COLLET (REDUCTION SLEEVE)

HK

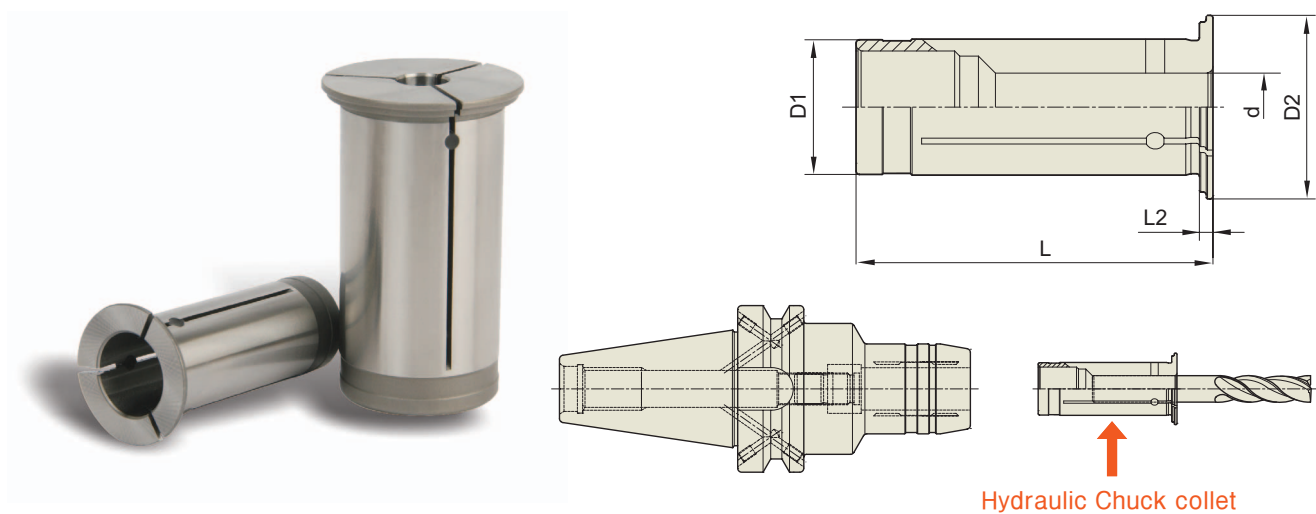

CODE No.		d	D1	D2	L	L2
HK12	3	3	12	19	47	2
	4	4	12	19	47	2
	5	5	12	19	47	2
	6	6	12	19	47	2
	7	7	12	19	47	2
	8	8	12	19	47	2
HK20	3	3	20	24	50.5	2
	4	4	20	24	50.5	2
	5	5	20	24	50.5	2
	6	6	20	24	50.5	2
	7	7	20	24	50.5	2
	8	8	20	24	50.5	2
	9	9	20	24	50.5	2
	10	10	20	24	50.5	2
	11	11	20	24	50.5	2
	12	12	20	24	50.5	2
	13	13	20	24	50.5	2
	14	14	20	24	50.5	2
	15	15	20	24	50.5	2
	16	16	20	24	50.5	2
	17	17	20	24	50.5	2
HK32	6	6	32	36	60.5	3
	8	8	32	36	60.5	3
	10	10	32	36	60.5	3
	12	12	32	36	60.5	3
	14	14	32	36	60.5	3
	16	16	32	36	60.5	3
	18	18	32	36	60.5	3
	20	20	32	36	60.5	3
	25	25	32	36	60.5	3

► Other special sizes of Hydraulic Chuck collets could be produced and supplied .

► Feature

Hydraulic Chuck collet(reduction sleeve) is divided into trisection by high precision wire cutting, which guarantees high precision ID.

► Chucking Method

Please assemble cutting tool with collet firstly, and then insert collet into Hydraulic Chuck.

